

JX BLIND RIVET NUTS FASTENERS SERIES



Special Blind Rivet Nuts

 <p>JX-F5-M6-18.8</p>	 <p> Grip range:0.5-3.0mm Material: Steel Surface: Color Zinc Size:M6 K=4.8-5.2mm L=18.2-18.8mm B=12.7-13.3mm D=8.9-9.0mm </p>	 <p>JX-F-M6-HEX(F)-B20-20</p>	 <p> Material: Steel Surface:Zinc nickel alloy Grip :0.5-3.0mm Size:M6 K=1.8-2.1mm L=19.7-20mm B=20mm D=9.8-10mm </p>
 <p>JX-F2.5-M6-HEX(F)-B18-19 A:JX-F-M6-HEX(F)-B18-1-18 B:JX-F-M6-HEX(F)-B18-1.5-16</p>	 <p> Material: Steel Surface:Zinc nickel alloy Size:M6 K=2.5mm L=19.5mm B=18-18.1mm S=8.8-9.0mm Grip:0.5-3.0mm A:Size:M6 K=1.0-1.2mm L=17.7-18.2mm B=17.8-18.0mm S=8.9-9.0mm B: K=1.45-1.5mm L=15.5-16mm B=17.8-18.0mm S=8.9-9.0mm </p>	 <p>JX-F-M6-HEX(F)-B18-19</p>	 <p> Material: Steel Surface:Zinc nickel alloy Grip :0.5-3.0mm Size:M6 K=1.9-2.3mm L=19.3-19.6mm B=18mm S=8.8-9.0mm </p>
 <p>JX-F-M6-R-SQU-B17-20</p>	 <p> Material: Steel Surface:Zinc nickel alloy Size:M6 K=2.3-2.7mm L=19.5-20.5mm B=16.8-17.3mm D=9.8-10.5mm Grip : 0.5-3.0mm </p>	 <p>JX-F-M6-R-B20-20</p>	 <p> Material: Steel Surface: Zinc nickel alloy Grip :0.5-3.0mm Size:M6 K=1.8-2.1mm L=19.5-20.5mm B=20mm D=9.8-10.0mm </p>
 <p>JX-F3-M6-R-B18-17-ST</p>	 <p> Material: Steel Surface:Zinc nickel alloy Grip :0.5-3.0mm Size:M6 K=2.98-3.08mm L=16.5-17.5mm B=17.8-18.2mm D=8.9-9.0mm </p>	 <p>JX-S-M6-R-B12-20</p>	 <p> Material: Steel Surface:Zinc nickel alloy Grip:0.5-3.0mm Size:M6 K=0.6-0.8mm L=19.5-20mm B=12.3-12.6mm D=9.8-10.0mm </p>
 <p>JX-F-M6-R-B18-19</p>	 <p> Material: Steel Surface:Zinc nickel alloy Grip :0.5-3.0mm </p>	 <p>JX-BF2.5-M6-RX9-19-SS</p>	 <p> Material: Stainless Steel Surface: Natural Color Grip range:0.5-3.0mm Size:M6 K=2.5-2.6mm L=18.7-19.1mm B=14.8-15.15mm D=8.8-9.0mm </p>

Surface treatment can also be manufactured according to customer requirements

JX BLIND RIVET NUTS FASTENERS SERIES

Flat Head Closed End Hexagonal Body With Seal Blind rivet nuts


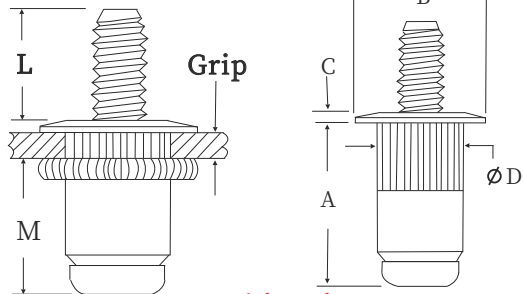



Special designs of blind rivet nuts
 Material:Steel
 Sealing nut with molded-on captive plastic seal.
 Used on car boot hinges to provide a pressure-tight connection.

Unit:mm

规格Size	P/N 料号	T	L _{±0.3}	A	D	B _{±0.5}	k _{±0.3}
M5	JX-BF-M5-HEX(F)-WS-18	0.5-3.0	18	13.5	7.0	12.5	1.5
M6	JX-BF-M6-HEX(F)-WS-24.5	0.5-3.0	24.5	18.5	9.0	18.0	2.5
M8	JX-BF-M8-HEX(F)-WS-28.7	0.5-3.0	28.7	21.7	11.0	21.0	2.4

Blind Rivet studs

Material:Steel
 Unit:mm

All dimensions are in millimeters

Thread Size	Grip Code	Grip Range	Stud Length“L” Nom. (at Max. Grip)			A ±0.051	B ±0.038	C Nom.	ØD Max.	M Ref.	Hole Size In Sheet +0.015
			12	15	20						
M4 x 0.7	2.0	0.5-2.0	JX-F-M4-R-BD-12	JX-F-M4-R-BD-15	JX-F-M4-R-BD-20	12.45	9.91	0.76	6.73	9.53	6.75
			10.7	13.7	18.7						
M4 x 0.7	3.3	2.0-3.3	JX-F-M4-R-BD-10.7	JX-F-M4-R-BD-13.7	JX-F-M4-R-BD-18.7	13.72	9.91	0.76	6.73	9.53	6.75
			12	15	20						
M5 x 0.8	3.3	0.5-3.3	JX-F-M5-R-BD-12	JX-F-M5-R-BD-15	JX-F-M5-R-BD-20	13.85	10.54	0.76	7.52	9.78	7.6
			9.6	12.6	17.6						
M5 x 0.8	5.7	3.3-5.7	JX-F-M5-R-BD-9.6	JX-F-M5-R-BD-12.6	JX-F-M5-R-BD-17.6	16.64	10.54	0.76	7.52	9.78	7.6
			15	20	25						
M6 x 1	4.2	0.7-4.2	JX-F-M6-R-BD-15	JX-F-M6-R-BD-20	JX-F-M6-R-BD-25	17.02	12.7	0.76	9.91	11.94	10
			12.6	17.6	22.6						
M6 x 1	6.6	4.2-6.6	JX-F-M6-R-BD-12.6	JX-F-M6-R-BD-17.6	JX-F-M6-R-BD-12	19.56	12.7	0.76	9.91	11.94	10
			16	22	28						
M8 x 1.25	3.8	0.7-3.8	JX-F-M8-R-BD-16	JX-F-M8-R-BD-22	JX-F-M8-R-BD-28	20.45	17.4	0.89	13.46	14.86	13.5
			13	17.9	23.9						
M8 x 1.25	7.9	3.8-7.9	JX-F-M8-R-BD-13	JX-F-M8-R-BD-17.9	JX-F-M8-R-BD-23.9	23.37	17.4	0.89	13.46	13.72	13.5
			20	25	30						
M10 x 1.5	3.8	0.7-3.8	JX-F-M10-R-BD-20	JX-F-M10-R-BD-25	JX-F-M10-R-BD-30	20.45	17.4	0.89	13.46	14.86	13.5
			17	20.9	25.9						
M10 x 1.5	7.9	3.8-7.9	JX-F-M10-R-BD-17	JX-F-M10-R-BD-20.9	JX-F-M10-R-BD-25.9	23.37	17.4	0.89	13.46	13.72	13.5
			20	25	30						

Surface treatment can also be manufactured according to customer requirements