


JX Fasteners for Metal Sheets and Panels Series

JX-PF50, JX-PF60 Low Profile Knob, Spring-loaded Fastener Assemblies

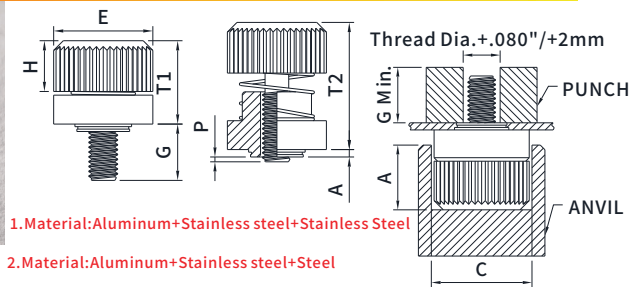

1. Material: Aluminum+Stainless steel+Stainless Steel

2. Material: Aluminum+Stainless steel+Steel



Color: Material Natural color and Black

Part Number Designation
JX-PF50 - 440 - 1 - 1 - CN

Type Thread Screw Finish
Smooth Code Length Code

All dimensions are in inches.

T1 Max.	T2 Nom.	Driver Size	Min. Dist Hole C/L To Edge
.340	.520	#1	.26
.340	.520	#2	.28
.340	.530	#2	.29
.360	.530	#2	.33
.395	.600	#2	.38

Thread Size	Type		Thread Code	Screw Length Code	A (Shank) Max.	Min. Sheet Thickness	Hole Size In Sheet +.003-.000	C Max.	E +.015 -.005	G ± 0.25	H ± 0.08	P ± 0.25
	Knurled Cap	Smooth Cap										
.112-40 (#4-40)	JX-PF50	JX-PF60	440	0	.030	.030	.203	.202	.406	.230	.207	.000
				1								.060
.138-32 (#6-32)	JX-PF50	JX-PF60	632	0	.030	.030	.219	.218	.438	.230	.207	.000
				1								.060
.164-32 (#8-32)	JX-PF50	JX-PF60	832	0	.030	.030	.250	.249	.468	.230	.217	.000
				1								.060
.190-32 (#10-32)	JX-PF50	JX-PF60	032	0	.030	.030	.312	.311	.530	.230	.225	.000
				1								.060
.250-20 (1/4-20)	JX-PF50	JX-PF60	0420	0	.058	.060	.375	.374	.625	.280	.246	.000
				1								.060



Part Number Designation
JX-PF60 - 440 - 1 - 1 - CN

Type Thread Screw Finish
Smooth Code Length Code

Part Number Designation
JX-PF60 - M3 - 1 - 1 - CN

Type Thread Screw Finish
Smooth Code Length Code

All dimensions are in millimeters.

T1 Max.	T2 Nom.	Driver Size	Min. Dist Hole C/L To Edge
8.64	13.21	#1	6.6
8.64	13.21	#2	7.1
8.64	13.46	#2	7.4
9.15	13.46	#2	8.4
10.04	15.24	#2	9.7

Thread Size	Type		Thread Code	Screw Length Code	A (Shank) Max.	Min. Sheet Thickness	Hole Size In Sheet +0.08	C Max.	E +0.4 -.013	G ± 0.64	H ± 0.2	P ± 0.64
	Knurled Cap	Smooth Cap										
M3x0.5	JX-PF50	JX-PF60	M3	0	0.77	0.8	5.5	5.48	10.3	5.84	5.26	0
				1								1.52
M3.5x0.6	JX-PF50	JX-PF60	M3.5	0	0.77	0.8	5.56	5.54	11.1	5.84	5.26	0
				1								1.52
M4x0.7	JX-PF50	JX-PF60	M4	0	0.77	0.8	6.4	6.38	11.9	5.84	5.51	0
				1								1.52
M5x0.8	JX-PF50	JX-PF60	M5	0	0.77	0.8	8	7.98	13.5	5.84	5.72	0
				1								1.52
M6x1	JX-PF50	JX-PF60	M6	0	1.47	1.5	9.5	9.48	15.9	7.11	6.25	0
				1								1.52


Remark: We only show part of the specifications, we can also produce various sizes according to the customer's requirements

JX Fasteners for Metal Sheets and Panels Series

JX-PFHV Screw Head, no Spring Panel Fastener Assemblies

1. Material: Stainless Steel+steel

2. Material: Stainless+Stainless

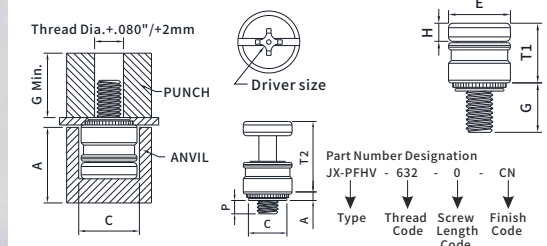

Part Number Designation
JX-PFHV - 632 - 0 - 1 - CN


Type Thread Screw Finish
Code Length Code

Thread Size	Type	Thread Code	Screw Length Code	A (Shank) Max.	Min. Sheet Thickness	Hole Size In Sheet +.003 -.000	C Max.	E ± 0.10	H ± 0.05	G ± 0.25	P ± 0.25	T1 Nom.	T2 Nom.	Driver Size	Min. Dist. Hole C/L To Edge
1	.316	.095													
.138-32 (#6-32)	JX-PFHV	632	0	.036	.036	.219	.218	.276	.092	.234	.000	.290	.484	#2	.230
			1												

All dimensions are in millimeters.

Thread Size	Type	Thread Code	Screw Length Code	A (Shank) Max.	Min. Sheet Thickness	Hole Size In Sheet +0.08	C Max.	E ± 0.25	H ± 0.13	G ± 0.64	P ± 0.64	T1 Nom.	T2 Nom.	Driver Size	Min. Dist. Hole C/L To Edge
1	7.56	1.9													
M3.5x0.6	JX-PFHV	M3.5	0	0.92	0.92	6	5.98	7.45	2.34	6.01	0	7.45	12.47	#2	6.3
			1												
M4x0.7	JX-PFHV	M4	0	0.92	0.92	6.4	6.38	7.85	2.79	6.59	0	8.5	14.1	#2	6.7
			1												

JX-PFK Type PFK Panel Fastener Assemblies

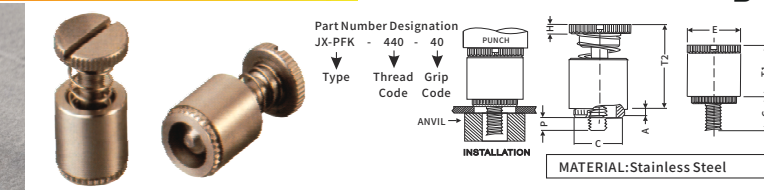

Thread Size	Type	Thread Code	Screw Length Code	A (Shank) Max.	Min. Sheet Thickness	Hole Size In Sheet +.003 -.000	C ± 0.03	E ± 0.10	G ± 0.16	H ± 0.05	P ± 0.25	T1 Max.	T2 Nom.	Min. Dist. Hole C/L To Edge		
															.112-40 (#4-40)	JX-PFK
62NS	.375	.125														
84NS	.500	.250														
.138-32 (#6-32)	JX-PFK	632	40	.060	.060	.281	.299	.344	.250	.072	.000	.36	.54	.26		
			62												.375	.125
			84NS												.500	.250

All dimensions are in millimeters.

Thread Size	Type	Thread Code	Screw Length Code	A (Shank) Max.	Min. Sheet Thickness	Hole Size In Sheet +0.08	C ± 0.08	E ± 0.25	G ± 0.4	H ± 0.13	P ± 0.64	T1 Max.	T2 Nom.	Min. Dist. Hole C/L To Edge		
															M3x0.5	JX-PFK
62NS	12.7	6.4														
84NS	12.7	6.4														

Remark: We only show part of the specifications, we can also produce various sizes according to the customer's requirements