


BLIND RIVET SERIES

Open End Aluminum blind rivet




- (A): Material:5052 Aluminum Body+Aluminum Mandrel
Domed head open end
- (B):Material:5052 Aluminum Body+Steel Mandrel
Domed head open end
- (C):Material:5052 Aluminum Body+Stainless Steel Mandrel
Domed head open end

Unit :Inch/mm

Size	L	F	Grip Range	Part NO	Hole Size	D	K	dk	Shear Strength lbs N		Tensile Strength lbs N	
									(A)	(B)	(A)	(B)
3/32 (2.4)	.225 (5.7)	.325 (8.3)	.032-.125 (0.8-3.2)	JX-AD 32 ABS	.097-.100 (2.46-2.54)	.092-.100 (2.46-2.54)	.024-.032 (0.61-0.82)	.178-.198 (4.56-5.07)	85 (378)	125 (378)	135 (600)	175 (778)
	.350 (8.9)	.450 (11.4)	.126-.250 (3.2-6.4)	JX-AD 34 ABS								
	.475 (12.1)	.575 (14.6)	.251-.375 (6.4-9.5)	JX-AD 36 ABS								
1/8 (3.2)	.188 (4.8)	.308 (7.8)	.032-.062 (0.8-1.6)	JX-AD 41 ABS	.129-.133 (3.3-3.4)	.122-.128 (3.12-3.28)	.032-.040 (0.82-1.02)	.238-.262 (6.09-6.71)	155 (689)	210 (934)	235 (1045)	325 (1445)
	.250 (6.4)	.370 (9.4)	.063-.125 (1.6-3.2)	JX-AD 42 ABS								
	.323 (8.0)	.433 (11.0)	.126-.187 (3.2-4.8)	JX-AD 43 ABS								
	.375 (9.5)	.495 (12.6)	.188-.250 (4.8-6.4)	JX-AD 44 ABS								
	.438 (11.1)	.558 (14.2)	.251-.312 (6.4-7.9)	JX-AD 45 ABS								
	.500 (12.7)	.620 (15.7)	.313-.375 (7.9-9.5)	JX-AD 46 ABS								
	.625 (15.9)	.745 (18.9)	.376-.500 (9.6-12.7)	JX-AD 48 ABS								
	.750 (19.1)	.870 (22.1)	.501-.625 (12.7-15.9)	JX-AD 410 ABS								
	.775 (19.7)	.895 (22.8)	.626-.750 (15.9-19.1)	JX-AD 412 ABS								
	.800 (20.3)	.920 (23.4)	.751-.875 (19.1-22.2)	JX-AD 414 ABS								
5/32 (4.0)	.338 (8.6)	.478 (12.1)	.126-.187 (3.2-4.8)	JX-AD 53 ABS	.160-.164 (4.06-4.17)	.153-.159 (3.92-4.07)	.039-.047 (1.00-1.20)	.296-.328 (7.58-8.40)	225 (1000)	340 (1512)	350 (1556)	490 (2179)
	.400 (10.2)	.540 (13.7)	.188-.250 (4.8-6.4)	JX-AD 54 ABS								
	.525 (13.3)	.665 (16.9)	.251-.375 (6.4-9.5)	JX-AD 56 ABS								
	.650 (16.5)	.790 (20.1)	.376-.500 (9.6-12.7)	JX-AD 58 ABS								
	.775 (19.7)	.915 (23.2)	.501-.625 (12.7-15.9)	JX-AD 510 ABS								
	.800 (20.3)	.940 (24.0)	.626-.750 (15.9-19.1)	JX-AD 512 ABS								
3/16 (4.8)	.425 (10.8)	.585 (14.9)	.126-.250 (3.2-6.4)	JX-AD 64 ABS	.192-.196 (4.88-4.98)	.183-.191 (4.68-4.89)	.047-.055 (1.2-1.41)	.357-.393 (9.14-10.06)	315 (1401)	445 (1979)	500 (2224)	720 (3202)
	.550 (14.0)	.710 (18.0)	.251-.375 (6.4-9.5)	JX-AD 66 ABS								
	.675 (17.2)	.835 (21.2)	.376-.500 (9.6-12.7)	JX-AD 68 ABS								
	.800 (20.3)	.960 (24.4)	.501-.625 (12.7-15.9)	JX-AD 610 ABS								
	.925 (23.5)	1.085 (27.6)	.626-.750 (15.9-19.1)	JX-AD 612 ABS								
	1.05 (26.7)	1.210 (30.7)	.751-.875 (19.1-22.2)	JX-AD 614 ABS								
1/4 (6.4)	1.175 (29.9)	1.335 (33.9)	.876-1.00 (22.3-25.4)	JX-AD 616 ABS	.257-.261 (6.53-6.63)	.249-.255 (6.53-6.63)	.065-.073 (1.66-1.86)	.475-.525 (12.16-13.44)	600 (2669)	890 (3858)	750 (3336)	1200 (5337)
	.350 (8.9)	.485 (12.4)	.063-.150 (1.6-3.8)	JX-AD 82 ABS								
	.475 (12.1)	.600 (15.2)	.063-.250 (1.6-6.4)	JX-AD 84 ABS								
	.600 (15.2)	.725 (18.4)	.251-.375 (6.4-9.5)	JX-AD 86 ABS								
	.725 (18.4)	.850 (21.6)	.376-.500 (9.6-12.7)	JX-AD 88 ABS								
	.850 (21.6)	1.085 (27.6)	.501-.625 (12.8-15.9)	JX-AD 810 ABS								
	.975 (24.8)	1.210 (30.7)	.626-.750 (15.9-19.1)	JX-AD 812 ABS								
	1.100 (27.9)	1.335 (33.9)	.751-.875 (19.1-22.2)	JX-AD 814 ABS								
	1.225 (31.1)	1.460 (37.1)	.876-1.00 (22.2-25.4)	JX-AD 816 ABS								

BLIND RIVET SERIES

Open End Large Flange Aluminum Blind rivet

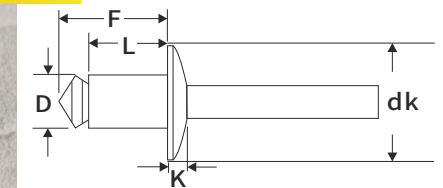

- (1):P/N: JX-AD X ABSLF
Material:5052 Aluminum Body+Aluminum Mandrel
Large Flange open end
- (2):P/N: JX -AD X BSLF
Material:5052 Aluminum Body+Steel Mandrel
Large Flange open end

Unit :Inch/mm

Size	L	F	Grip Range	Part NO	Hole Size	D	K	dk	Shear Strength lbs N		Tensile Strength lbs N	
									(1)	(2)	(1)	(2)
1/8 (3.2)	.250 (6.4)	.370 (9.4)	.063-.125 (1.6-3.2)	JX-AD 42 ABS LF	.129-.133 (3.3-3.4)	.122-.128 (3.12-3.28)	.034-.046 (0.87-1.18)	.360-.390 (9.14-9.91)	165 (689)	210 (934)	235 (1045)	325 (1445)
	.313 (7.9)	.433 (11.0)	.126-.187 (3.2-4.8)	JX-AD 43 ABS LF								
	.375 (9.5)	.495 (12.6)	.188-.250 (4.8-6.4)	JX-AD 44 ABS LF								
	.500 (12.7)	.620 (15.7)	.313-.375 (7.9-9.5)	JX-AD 46 ABS LF								
5/32 (4.0)	.400 (10.2)	.540 (13.7)	.188-.250 (4.8-6.4)	JX-AD 54 ABS LF	.160-.164 (4.06-4.17)	.153-.159 (3.92-4.07)	.042-.056 (1.08-1.43)	.448-.488 (11.38-12.40)	225 (1000)	340 (1512)	350 (1556)	490 (2179)
	.525 (13.3)	.665 (16.9)	.251-.375 (6.4-9.5)	JX-AD 56 ABS LF								
	.650 (16.5)	.790 (20.1)	.376-.500 (9.6-12.7)	JX-AD 58 ABS LF								
3/16 (4.8)	.425 (10.8)	.585 (14.9)	.126-.250 (3.2-6.4)	JX-AD 64 ABS LF	.192-.196 (4.88-4.98)	.183-.191 (4.68-4.89)	.067-.083 (1.72-2.12)	.600-.650 (15.24-16.51)	315 (1401)	445 (1979)	500 (2224)	720 (3202)
	.550 (14.0)	.710 (18.0)	.251-.375 (6.4-9.5)	JX-AD 66 ABS LF								
	.675 (17.2)	.835 (21.2)	.376-.500 (9.6-12.7)	JX-AD 68 ABS LF								
	.800 (20.3)	.960 (24.4)	.501-.625 (12.8-15.9)	JX-AD 610 ABS LF								
	.925 (23.5)	1.085 (27.6)	.626-.750 (15.9-19.1)	JX-AD 612 ABS LF								
	1.175 (29.8)	1.335 (33.9)	.751-.875 (19.1-22.2)	JX-AD 616 ABS LF								