


# JX BLIND RIVET SERIES

## Close End 120° Countersunk Head Blind rivets

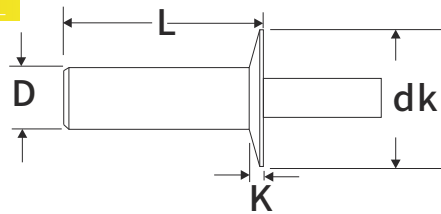


Material: 1. Aluminum Body+Steel Mandrel  
Close End 120° Countersunk Head  
2. Aluminum Body+Aluminum Mandrel  
Close End 120° Countersunk Head

Unit: Inch/mm

Size	L	Grip Range	Part NO	Hole Size	D	K	dk	Shear Strength lbs N	Tensile Strength lbs N									
1/8 (3.2)	.277 (7.0)	.032-.062 (0.8-1.6)	JX-AK 41 H	.129-.133 (3.3-3.38)	.124-.128 (3.17-3.28)	.035-.055 (0.89-1.4)	.221-.245 (5.61-6.22)	305 (1356)	385 (1712)									
	.41 (8.7)	.063-.125 (1.6-3.2)	JX-AK 42 H															
	.402 (10.2)	.126-.250 (3.2-6.4)	JX-AK 43 H															
	.466 (11.8)	.188-.250 (6.4-7.9)	JX-AK 44 H															
	.528 (13.4)	.251-.312 (7.9-9.5)	JX-AK 45 H															
	.591 (15.0)	.313-.375 (9.5-12.7)	JX-AK 46 H															
5/32 (4.0)	.307 (7.8)	.032-.062 (1.6-3.2)	JX-AK 51 H	.160-.164 (4.06-4.17)	.155-.159 (3.94-4.07)	.045-.055 (1.18-1.4)	.297-.327 (7.54-8.31)	430 (1912)	605 (12691)									
	.370 (9.4)	.063-.125 (3.25-4.8)	JX-AK 52 H															
	.432 (11.0)	.126-.187 (4.8-6.4)	JX-AK 53 H															
	.475 (12.6)	.251-.312 (6.4-7.9)	JX-AK 55 H															
	.558 (14.2)	.313-.375 (7.9-9.5)	JX-AK 56 H															
	3/16 (4.8)	.395 (10.0)	.063-.125 (1.6-3.2)							JX-AK 62 H	.192-.196 (4.88-4.98)	.186-.191 (4.76-4.89)	.055-.065 (1.41-1.66)	.355-.395 (9.02-10.03)	575 (2557)	840 (3736)		
.520 (13.3)		.126-.250 (3.2-6.4)	JX-AK 64 H															
.645 (16.4)		.251-.375 (6.4-9.5)	JX-AK 66 H															
				.485 (12.3)	.126-.250 (3.2-6.4)	JX-AD 84 H	.257-.261 (6.53-6.63)	.249-.256 (6.32-6.48)	.079-.099 (2.0-2.51)	.475-.525 (12.07-13.34)							900 (4003)	1100 (4893)
				.610 (15.5)	.251-.375 (6.4-9.5)	JX-AD 86 H												

# JX BLIND RIVET SERIES

## Close End Dome Head Aluminum Blind Rivets

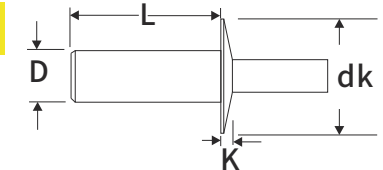

(A) Material: 1. Aluminum Body+Steel Mandrel  
Domed Head Close End  
2. Aluminum Body+Aluminum Mandrel  
Domed Head Close End  
(B) Material: 1. Aluminum Large Flange Body+Steel Mandrel  
Domed Head Large Flange Close End  
2. Aluminum Large Flange Body+Aluminum Mandrel  
Domed Head Large Flange Close End

Unit: Inch/mm

Size	L	Grip Range	Part NO	Hole Size	D	K	dk	Shear Strength lbs N	Tensile Strength lbs N
1/8 (3.2)	.237 (6.0)	.032-.062 (0.8-1.6)	JX-AD 41 H	.129-.133 (3.3-3.4)	.124-.128 (3.17-3.28)	(A) .031-.051 (0.79-1.31)	(A) .224-.248 (5.73-6.30)	305 (1356)	385 (1712)
			JX-AD 41 H-B						
			JX-AD 42 H						
			JX-AD 42 H-B						
			JX-AD 43 H						
			JX-AD 43 H-B						
1/8 (3.2)	.487 (12.4)	.251-.312 (6.4-7.9)	JX-AD 45 H	.129-.133 (3.3-3.4)	.124-.128 (3.17-3.28)	(A) .031-.051 (0.79-1.31)	(A) .248-.272 (6.3-6.91)	305 (1356)	385 (1712)
			JX-AD 45 H-B						
			JX-AD 46 H						
			JX-AD 46 H-B						
			JX-AD 48 H						
			JX-AD 48 H-B						
5/32 (4.0)	.315 (8.0)	.063-.125 (1.6-3.2)	JX-AD 52 H	.160-.164 (4.06-4.17)	.154-.159 (3.94-4.07)	(A) .046-.066 (1.18-1.69)	(A) .297-.327 (7.55-8.37)	430 (1912)	605 (12691)
			JX-AD 52 H-B						
			JX-AD 53 H						
			JX-AD 53 H-B						
			JX-AD 54 H						
			JX-AD 54 H-B						
3/16 (4.8)	.330 (8.4)	.063-.125 (1.6-3.2)	JX-AD 62 H	.192-.196 (4.88-4.98)	.186-.191 (4.76-4.89)	(A) .061-.081 (1.56-2.07)	(A) .357-.393 (9.07-9.98)	575 (2557)	840 (3736)
			JX-AD 62 H-B						
			JX-AD 63 H						
			JX-AD 63 H-B						
			JX-AD 64 H						
			JX-AD 64 H-B						
1/4 (6.4)	.485 (12.3)	.126-.250 (3.2-6.4)	JX-AD 65 H	.257-.261 (6.53-6.63)	.249-.256 (6.32-6.48)	(B) .056-.176 (1.42-1.95)	(B) .413-.452 (10.5-11.50)	900 (4003)	1100 (4893)
			JX-AD 65 H-B						
			JX-AD 66 H						
			JX-AD 66 H-B						
			JX-AD 68 H						
			JX-AD 68 H-B						