


# JX AUTOMOTIVE SCREWS FASTENERS SERIES

## Type B, Regular Thumb Screws And Round Head(UNS G10060)




Part Number Designation  
 JX-ANSIB1868-#6-1"-ST  
 ↓  
 Type and Material Code: Carbon Steel  
 ↓  
 Thread Long Code: #6-1"  
 ↓  
 Material Code: ST  
 Part Number Designation  
 JX-ANSIB1868-#6-1"-SS  
 ↓  
 Type and Material Code: Stainless Steel  
 ↓  
 Thread Long Code: #6-1"  
 ↓  
 Material Code: SS  
 Material: carbon steel, copper, stainless steel SUS201, SUS304, SUS316

Standard:ASME/ANSI B 18.6.8-2010  
 Grade:4.8, 5.8, 8.8, 10.9, 12.9  
 Surface treatment: ROHS white zinc, black zinc, color zincBlue zinc, nickel, zinc-nickel alloy, Dacromet  
 Unit:inch

Size d	Thread Code	P/N		L	A	B	C	D	L											
		Carbon Steel	Stainless steel							Long Code										
										Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	
#6	32	JX-ANSIB1868-#6-L-ST	JX-ANSIB1868-#6-L-SS	6	8	10	12	16	20	25	0.45	0.43	0.28	0.26	0.08	0.06	0.03	0.02	1.0	0.25
#8	32	JX-ANSIB1868-#8-L-ST	JX-ANSIB1868-#8-L-SS	8	10	12	16	20	25	0.51	0.49	0.32	0.30	0.09	0.07	0.04	0.02	1.0	0.38	
#10	24/32	JX-ANSIB1868-#10-L-ST	JX-ANSIB1868-#10-L-SS	8	10	12	16	20	25	30	0.58	0.54	0.39	0.36	0.1	0.08	0.05	0.03	2.0	0.38
#12	24	JX-ANSIB1868-#12-L-ST	JX-ANSIB1868-#12-L-SS	8	10	12	16	20	25	30	0.71	0.67	0.45	0.43	0.11	0.09	0.05	0.03	2.0	0.38
1/4	20/28	JX-ANSIB1868-1/4-L-ST	JX-ANSIB1868-1/4-L-SS	13	15	20	25	30	35	40	0.83	0.8	0.52	0.48	0.14	0.06	0.03	2.5	0.5	
5/16	18	JX-ANSIB1868-5/16-L-ST	JX-ANSIB1868-5/16-L-SS	13	15	20	25	30	35	40	0.96	0.91	0.64	0.60	0.17	0.14	0.09	0.06	3.0	0.5
3/8	16	JX-ANSIB1868-3/8-L-ST	JX-ANSIB1868-3/8-L-SS	20	25	30	35	40	45	50	1.09	1.03	0.71	0.67	0.22	0.18	0.11	0.08	3.0	0.75
7/16	14	JX-ANSIB1868-7/16-L-ST	JX-ANSIB1868-7/16-L-SS	25	30	35	40	45	50	55	1.4	1.35	0.96	0.91	0.27	0.24	0.14	0.11	4.0	1.0
1/2	13	JX-ANSIB1868-1/2-L-ST	JX-ANSIB1868-1/2-L-SS	25	30	35	40	45	50	55	1.54	1.46	1.09	1.03	0.33	0.29	0.15	0.11	4.0	1.0

## JX-Q192B Cup head square neck bolts with large head


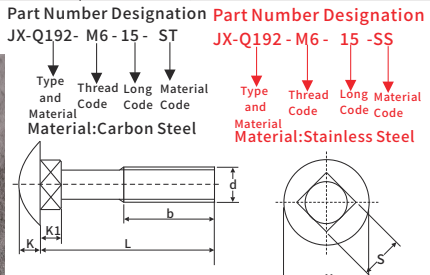


Standard:Q192, GB/T 14-1988  
 Material: carbon steel, copper, stainless steel SUS201, SUS304, SUS316  
 Surface treatment: ROHS white zinc, black zinc, color zincBlue zinc, nickel, zinc-nickel alloy, Dacromet  
 Unit:mm

Size d	P/N	b mm		dk	K1	K	s								
		Carbon Steel	Stainless steel					Long Code							
								L<125	125<L<200	Max	Min	Max	Min	Max	Min
M6	JX-Q192-M6-L-ST	JX-Q192-M6-L-SS	18	18	15.1	13.3	4.4	3.6	3.48	2.7	6.3	5.84			
M8	JX-Q192-M8-L-ST	JX-Q192-M8-L-SS	22	28	19.1	17.3	5.4	4.6	4.48	3.6	8.36	7.8			
M10	JX-Q192-M10-L-ST	JX-Q192-M10-L-SS	26	32	24.3	22.16	6.4	6.6	5.48	4.6	10.36	9.8			
M12	JX-Q192-M12-L-ST	JX-Q192-M12-L-SS	30	36	29.3	27.16	8.45	7.55	6.48	5.6	12.43	11.76			
M14	JX-Q192-M14-L-ST	JX-Q192-M14-L-SS	34	40	33.60	31	9.45	8.55	7.9	6.55	14.43	13.76			
M16	JX-Q192-M16-L-ST	JX-Q192-M16-L-SS	38	44	36.6	34	10.45	9.55	8.9	7.55	16.43	15.76			
M20	JX-Q192-M20-L-ST	JX-Q192-M20-L-SS	46	52	45.6	43	12.55	11.45	10.9	9.55	20.52	19.72			
M24	JX-Q192-M24-L-ST	JX-Q192-M24-L-SS	54	60	53.90	50.8	17.55	16.45	13.1	11.45	24.52	23.72			

# JX AUTOMOTIVE SCREWS FASTENERS SERIES

## JX-DIN580 Lifting Eye Bolts

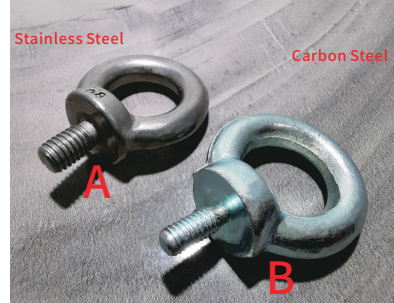


Part Number Designation  
 JX-D580- M6- 16- ST  
 ↓  
 Type and Thread Code: M6-16  
 ↓  
 Material Code: Carbon Steel  
 Part Number Designation  
 JX-D580- M6- 16- SS  
 ↓  
 Type and Thread Code: M6-16  
 ↓  
 Material Code: Stainless Steel  
 Material: carbon steel, copper, stainless steel SUS201, SUS304, SUS316

Standard:DIN580-1972  
 Material: carbon steel, copper, stainless steel SUS201, SUS304, SUS316  
 Surface treatment: ROHS white zinc, black zinc, color zincBlue zinc, nickel, zinc-nickel alloy, Dacromet

Size d	Thread Code	P/N		L	d1	D1	d2	d3								
		Carbon Steel	Stainless steel						Long Code							
									Nom	Max	Min	Max	Min	Nom ds	Max	Min
M6	36	JX-D580-M6-16-L-ST	JX-D580-M6-16-L-SS	16	16.9	15.1	9.1	7.9	20	20.4	19	21.1	19.6	6	5.82	
M8	36	JX-D580-M8-16-L-ST	JX-D580-M8-16-L-SS	16	16.9	15.1	9.1	7.9	20	20.4	19	21.1	19.6	6	5.82	
M10	44	JX-D580-M10-20-L-ST	JX-D580-M10-20-L-SS	20	21.05	18.95	11.1	9.6	24	24.4	23	25.1	23.6	7.7	7.48	
M12	52	JX-D580-M12-22-L-ST	JX-D580-M12-22-L-SS	22	23.05	20.95	13.1	11.6	28	28.4	27	29.1	27.6	9.4	9.18	
M16	62	JX-D580-M16-28-L-ST	JX-D580-M16-28-L-SS	28	29.05	27	15.2	13.6	34	34.5	32.9	35.2	33.6	13	12.73	
M20	72	JX-D580-M20-35-L-ST	JX-D580-M20-35-L-SS	35	36.25	33.75	17.4	15.6	40	40.6	38.8	41.4	39.6	16.4	16.13	
M24	88	JX-D580-M24-40-L-ST	JX-D580-M24-40-L-SS	40	41.25	38.75	21.4	19.6	48	48.6	46.8	49.4	47.6	19.6	19.27	
M30	104	JX-D580-M30-45-L-ST	JX-D580-M30-45-L-SS	45	46.25	43.75	25.7	23.5	56	56.6	54.6	57.7	55.5	25	24.67	
M36	123	JX-D580-M36-55-L-ST	JX-D580-M36-55-L-SS	55	56.5	53.5	30	27.5	67	67.7	65.5	69	66.5	30.8	29.91	
M42	144	JX-D580-M42-65-L-ST	JX-D580-M42-65-L-SS	65	66.5	63.5	34.4	31.2	80	80.9	78.1	82.4	79.2	35.6	35.21	
M48	171	JX-D580-M48-70-L-ST	JX-D580-M48-70-L-SS	70	71.5	68.5	40.7	37.1	95	96.1	92.9	97.7	94.1	41	40.61	
M56	196	JX-D580-M56-80-L-ST	JX-D580-M56-80-L-SS	80	81.5	78.5	44.7	41.1	112	113.1	109.9	114.7	111.1	48.3	47.91	
M64	221	JX-D580-M64-90-L-ST	JX-D580-M64-90-L-SS	90	91.75	88.25	51.4	46.9	125	126.3	122.3	128.4	123.9	55.63	55.24	

## JX-DIN582 Lifting Eye Nuts



Part Number Designation  
 JX-D582- M8-ST  
 ↓  
 Type and Thread Code: M8-ST  
 ↓  
 Material Code: Carbon Steel  
 Part Number Designation  
 JX-D582- M8- SS  
 ↓  
 Type and Thread Code: M8-SS  
 ↓  
 Material Code: Stainless Steel  
 Material: carbon steel, copper, stainless steel SUS201, SUS304, SUS316  
 Surface treatment: ROHS white zinc, black zinc, color zincBlue zinc, nickel, zinc-nickel alloy, Dacromet

Size d	Thread Code	P/N			dk	D2	D1	K	d2
		Carbon Steel	Stainless steel	Brass					
M8	1.25	JX-DIN582-M8-ST	JX-DIN582-M8-SS	JX-DIN582-M8-B	20	36	20	8.5	8
M10	1.5	JX-DIN582-M10-ST	JX-DIN582-M10-SS	JX-DIN582-M10-B	25	45	25	10	10
M12	1.75	JX-DIN582-M12-ST	JX-DIN582-M12-SS	JX-DIN582-M12-B	30	54	30	11	12
M16	2	JX-DIN582-M16-ST	JX-DIN582-M16-SS	JX-DIN582-M16-B	35	63	35	13	14
M20	2.25	JX-DIN582-M20-ST	JX-DIN582-M20-SS	JX-DIN582-M20-B	40	72	40	16	16
M24	2.3	JX-DIN582-M24-ST	JX-DIN582-M24-SS	JX-DIN582-M24-B	50	90	50	20	20
M30	2.35	JX-DIN582-M30-ST	JX-DIN582-M30-SS	JX-DIN582-M30-B	65	108	60	25	24
M36	3/4	JX-DIN582-M36-ST	JX-DIN582-M36-SS	JX-DIN582-M36-B	75	126	70	30	28
M42	3.45	JX-DIN582-M42-ST	JX-DIN582-M42-SS	JX-DIN582-M42-B	85	144	80	35	32
M48	3.5	JX-DIN582-M48-ST	JX-DIN582-M48-SS	JX-DIN582-M48-B	100	166	90	40	38
M56	4.55	JX-DIN582-M56-ST	JX-DIN582-M56-SS	JX-DIN582-M56-B	110	184	100	45	42
M64	4.6	JX-DIN582-M64-ST	JX-DIN582-M64-SS	JX-DIN582-M64-B	120	206	110	50	48
M72	4.6	JX-DIN582-M72-ST	JX-DIN582-M72-SS	JX-DIN582-M72-B	150	260	140	60	60
M80	4.6	JX-DIN582-M80-ST	JX-DIN582-M80-SS	JX-DIN582-M80-B	170	296	160	70	68
M100	4.6	JX-DIN582-M100-ST	JX-DIN582-M100-SS	JX-DIN582-M100-B	190	330	180	80	75

http://www.juxinfasteners.com

http://www.juxinfasteners.com