
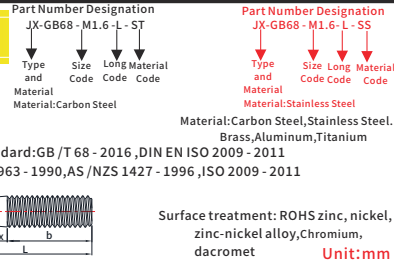




SCREWS FASTENERS SERIES

GB/T68-2016 Slotted Countersunk Flat Head Screws

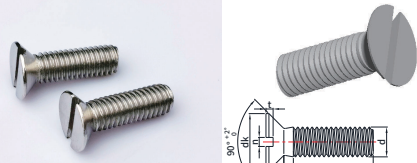

Size	P/N		Pitch	a		b		dk		k		n		t		x
	Carbon Steel	Stainless Steel		Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max		
M1.6	JX-GB68-M1.6-L-ST	JX-GB68-M1.6-L-SS	0.35	0.7	25	3.6	3	2.7	1	0.4	0.6	0.46	0.5	0.32	0.9	
M2	JX-GB68-M2-L-ST	JX-GB68-M2-L-SS	0.4	0.8	25	4.4	3.8	3.5	1.2	0.5	0.7	0.56	0.6	0.4	1	
M2.5	JX-GB68-M2.5-L-ST	JX-GB68-M2.5-L-SS	0.45	0.9	25	5.5	4.7	4.4	1.5	0.6	0.8	0.66	0.75	0.5	1.1	
M3	JX-GB68-M3-L-ST	JX-GB68-M3-L-SS	0.5	1	25	6.3	5.5	5.2	1.65	0.8	1	0.86	0.85	0.6	1.25	
M3.5	JX-GB68-M3.5-L-ST	JX-GB68-M3.5-L-SS	0.6	1.2	38	8.2	7.3	6.94	2.35	1	1.2	1.06	1.2	0.9	1.5	
M4	JX-GB68-M4-L-ST	JX-GB68-M4-L-SS	0.7	1.4	38	9.4	8.4	8.04	2.7	1.2	1.51	1.26	1.3	1	1.75	
M5	JX-GB68-M5-L-ST	JX-GB68-M5-L-SS	0.8	1.6	38	10.4	9.3	8.94	2.7	1.2	1.51	1.26	1.4	1.1	2	
M6	JX-GB68-M6-L-ST	JX-GB68-M6-L-SS	1	2	38	12.6	11.3	10.87	3.3	1.6	1.91	1.66	1.6	1.2	2.5	
M8	JX-GB68-M8-L-ST	JX-GB68-M8-L-SS	1.25	2.5	38	17.3	15.8	15.37	4.65	2	2.31	2.06	2.3	1.8	3.2	
M10	JX-GB68-M10-L-ST	JX-GB68-M10-L-SS	1.5	3	38	20	18.3	17.78	5	2.5	2.81	2.56	2.6	2	3.8	

GB/T67-2016 Slotted Pan Head Screws

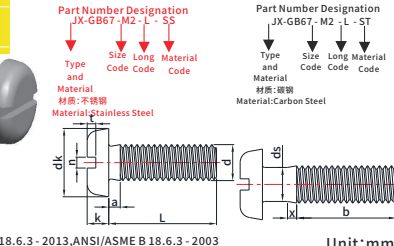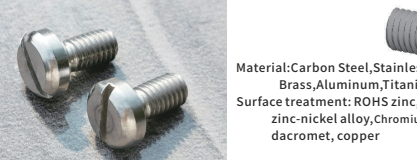


Size	P/N		Pitch	a		b		dk		k		n		t		x
	Carbon Steel	Stainless Steel		Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max		
M1.6	JX-GB67-M1.6-L-ST	JX-GB67-M1.6-L-SS	0.35	0.7	25	3.2	2.9	1	0.85	0.4	0.46	0.6	0.35	0.9		
M2	JX-GB67-M2-L-ST	JX-GB67-M2-L-SS	0.4	0.8	25	4	3.7	1.3	1.1	0.5	0.56	0.7	0.5	1		
M2.5	JX-GB67-M2.5-L-ST	JX-GB67-M2.5-L-SS	0.45	0.9	25	5	4.7	1.5	1.3	0.6	0.66	0.8	0.6	1.1		
M3	JX-GB67-M3-L-ST	JX-GB67-M3-L-SS	0.5	1	25	5.6	5.3	1.8	1.6	0.8	0.86	1	0.7	1.25		
M4	JX-GB67-M4-L-ST	JX-GB67-M4-L-SS	0.7	1.4	38	8	7.64	2.4	2.2	1.2	1.26	1.51	1	1.75		
M5	JX-GB67-M5-L-ST	JX-GB67-M5-L-SS	0.8	1.6	38	9.5	9.14	3	2.8	1.2	1.26	1.51	1.2	2		
M6	JX-GB67-M6-L-ST	JX-GB67-M6-L-SS	1	2	38	12	11.57	3.6	3.3	1.6	1.66	1.91	1.4	2.5		
M8	JX-GB67-M8-L-ST	JX-GB67-M8-L-SS	1.25	2.5	38	16	15.57	4.8	4.5	2	2.06	2.31	1.9	3.2		
M10	JX-GB67-M10-L-ST	JX-GB67-M10-L-SS	1.5	3	38	20	19.48	6	5.7	2.5	2.56	2.81	2.4	3.8		

B.S.W.&B.S.F. Slotted Mushroom Head Screws With B.S.W. & B.S.F. Threads [Table 8]




ds: shall not exceed the basic major diameter of the screw thread and shall not be less than the minimum effective diameter of the screw thread

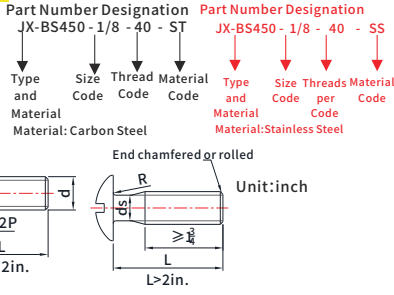

Material: Carbon Steel, Stainless steel, Brass



SCREWS FASTENERS SERIES

GB/T 65-2016 Slotted Cheese Head Screws

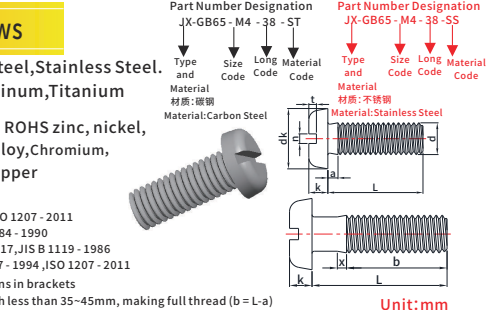

规格	P/N			Pitch	a		b		dk		k		n		t		x
	Carbon Steel	Stainless Steel	Brass		Full Thread Max	Half Thread Min	nom.	min.	nom.	min.	nom.	min.	nom.	max.	min.	max.	
M1.6	JX-GB65-M1.6-L-ST	JX-GB65-M1.6-L-SS	JX-GB65-M1.6-L-B	0.35	0.7	25	3.2	2.9	1	0.86	0.4	0.6	0.46	0.35	0.9		
M2	JX-GB65-M2-L-ST	JX-GB65-M2-L-SS	JX-GB65-M2-L-B	0.4	0.8	25	4	3.7	1.3	1.16	0.5	0.7	0.56	0.5	1		
M2.5	JX-GB65-M2.5-L-ST	JX-GB65-M2.5-L-SS	JX-GB65-M2.5-L-B	0.45	0.9	25	5	4.7	1.5	1.36	0.6	0.8	0.66	0.6	1.1		
M3	JX-GB65-M3-L-ST	JX-GB65-M3-L-SS	JX-GB65-M3-L-B	0.5	1	25	5.6	5.3	1.8	1.66	0.8	1	0.86	0.7	1.25		
M3.5	JX-GB65-M3.5-L-ST	JX-GB65-M3.5-L-SS	JX-GB65-M3.5-L-B	0.6	1.2	38	7	6.64	2.1	1.96	1	1.2	1.06	0.8	1.5		
M4	JX-GB65-M4-L-ST	JX-GB65-M4-L-SS	JX-GB65-M4-L-B	0.7	1.4	38	8	7.64	2.4	2.26	1.2	1.51	1.26	1	1.75		
M5	JX-GB65-M5-L-ST	JX-GB65-M5-L-SS	JX-GB65-M5-L-B	0.8	1.6	38	9.5	9.14	3	2.88	1.2	1.51	1.26	1.2	2		
M6	JX-GB65-M6-L-ST	JX-GB65-M6-L-SS	JX-GB65-M6-L-B	1	2	38	12	11.57	3.6	3.3	1.6	1.91	1.66	1.4	2.5		
M8	JX-GB65-M8-L-ST	JX-GB65-M8-L-SS	JX-GB65-M8-L-B	1.25	2.5	38	16	15.57	4.8	4.5	2	2.31	2.06	1.9	3.2		
M10	JX-GB65-M10-L-ST	JX-GB65-M10-L-SS	JX-GB65-M10-L-B	1.5	3	38	20	19.48	6	5.7	2.5	2.81	2.56	2.4	3.8		

DIN 921-2014 Slotted Pan Head Screws With Large Head

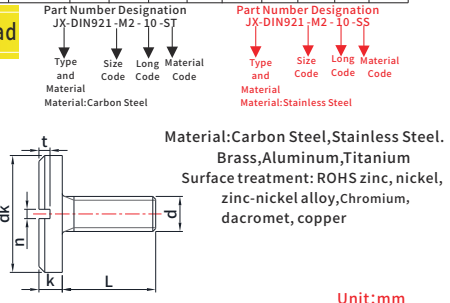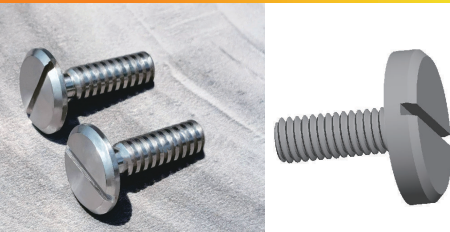

规格	料号P/N			p	dk		k		n		t		Min	
	碳钢Carbon Steel	不锈钢Stainless Steel	铜Brass		Max	Min	Max	Min	Max	Min	Max			
M1	JX-DIN921-M1-L-ST	JX-DIN921-M1-L-SS	JX-DIN921-M1-L-B	0.25	3.5	3.2	0.7	0.82	0.58	0.25	0.45	0.31	0.5	0.35
M1.2	JX-DIN921-M1.2-L-ST	JX-DIN921-M1.2-L-SS	JX-DIN921-M1.2-L-B	0.25	4	3.7	0.8	0.92	0.68	0.3	0.5	0.36	0.55	0.4
M1.4	JX-DIN921-M1.4-L-ST	JX-DIN921-M1.4-L-SS	JX-DIN921-M1.4-L-B	0.3	4.5	4.2	0.9	1.02	0.78	0.3	0.5	0.36	0.6	0.45
M1.6	JX-DIN921-M1.6-L-ST	JX-DIN921-M1.6-L-SS	JX-DIN921-M1.6-L-B	0.35	5	4.7	1	1.12	0.88	0.4	0.6	0.46	0.7	0.5
M2	JX-DIN921-M2-L-ST	JX-DIN921-M2-L-SS	JX-DIN921-M2-L-B	0.4	6	5.64	1.2	1.32	1.08	0.5	0.7	0.56	0.8	0.6
M2.5	JX-DIN921-M2.5-L-ST	JX-DIN921-M2.5-L-SS	JX-DIN921-M2.5-L-B	0.45	7	6.64	1.5	1.62	1.38	0.6	0.8	0.66	0.95	0.75
M3	JX-DIN921-M3-L-ST	JX-DIN921-M3-L-SS	JX-DIN921-M3-L-B	0.5	8	7.64	1.8	1.92	1.68	0.8	1	0.86	1.15	0.9
M4	JX-DIN921-M4-L-ST	JX-DIN921-M4-L-SS	JX-DIN921-M4-L-B	0.7	12	11.57	2.4	2.52	2.28	1	1.2	1.06	1.5	1.2
M5	JX-DIN921-M5-L-ST	JX-DIN921-M5-L-SS	JX-DIN921-M5-L-B	0.8	16	15.57	2.7	2.82	2.58	1.2	1.51	1.26	1.6	1.3
M6	JX-DIN921-M6-L-ST	JX-DIN921-M6-L-SS	JX-DIN921-M6-L-B	1	20	19.48	3.1	3.25	2.95	1.6	1.91	1.66	1.9	1.5
M8	JX-DIN921-M8-L-ST	JX-DIN921-M8-L-SS	JX-DIN921-M8-L-B	1.25	25	24.48	3.8	3.95	3.65	2	2.31	2.06	2.4	1.9
M10	JX-DIN921-M10-L-ST	JX-DIN921-M10-L-SS	JX-DIN921-M10-L-B	1.5	30	29.48	4.6	4.75	4.45	2.5	2.81	2.56	2.8	2.3

http://www.juxinfasteners.com

http://www.juxinfasteners.com