




JX SCREW FASTENERS SERIES

Round Washer Head with TORX PLUS Self-tapping Screw PT Thread

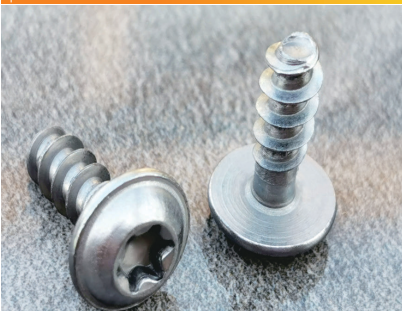

Material: carbon steel, stainless steel, aluminum, titanium
Surface Treatment: Zinc, Zinc Nickel Alloy, Dacromet
Carbon steel grades: 5.8, 8.8, 10.9, 12.9

Self-tapping fastener for plastics
(thermoplastic materials)

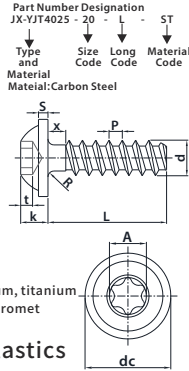

Part Number Designation
JX-YJT4025 - 20 - L - SS

Type and Material: Stainless steel
Size Code: 20
Long Code: L
Material Code: SS

Part Number Designation
JX-YJT4025 - 20 - L - ST

Type and Material: Carbon Steel
Size Code: 20
Long Code: L
Material Code: ST


Unit:mm

Size	P/N		Pitch	d	dc max.	k	S	R max.	Slot No.	A			
	Carbon Steel	Stainless steel								nom.	min.	max.	max.
2.0	JX-YJT4025-2.0-L-ST	JX-YJT4025-2.0-L-SS	0.78	2	4.5	1.6	0.6	0.35	6IP	1.75	0.65	0.85	1
2.2	JX-YJT4025-2.2-L-ST	JX-YJT4025-2.2-L-SS	0.85	2.2	5	1.6	0.6	0.35	6IP	1.75	0.65	0.85	1.1
2.5	JX-YJT4025-2.5-L-ST	JX-YJT4025-2.5-L-SS	0.95	2.5	5.5	1.9	0.7	0.4	8IP	2.4	0.8	1	1.3
3.0	JX-YJT4025-3.0-L-ST	JX-YJT4025-3.0-L-SS	1.12	3	6.5	2.3	0.8	0.5	10IP	2.8	1	1.3	1.5
3.5	JX-YJT4025-3.5-L-ST	JX-YJT4025-3.5-L-SS	1.29	3.5	7.5	2.7	0.9	0.5	15IP	3.35	1.1	1.5	1.8
4.0	JX-YJT4025-4.0-L-ST	JX-YJT4025-4.0-L-SS	1.46	4	9	3.1	1	0.6	20IP	3.95	1.4	1.8	2
4.5	JX-YJT4025-4.5-L-ST	JX-YJT4025-4.5-L-SS	1.63	4.5	10	3.2	1.1	0.6	20IP	3.95	1.4	1.8	2.3
5.0	JX-YJT4025-5.0-L-ST	JX-YJT4025-5.0-L-SS	1.8	5	11	3.5	1.2	0.7	25IP	4.5	1.5	1.9	2.5
6.0	JX-YJT4025-6.0-L-ST	JX-YJT4025-6.0-L-SS	2.14	6	13.5	4.2	1.4	0.8	30IP	5.6	1.9	2.4	3
7.0	JX-YJT4025-7.0-L-ST	JX-YJT4025-7.0-L-SS	2.48	7	15.5	4.9	1.6	0.9	30IP	5.6	2.3	2.9	3.5
8.0	JX-YJT4025-8.0-L-ST	JX-YJT4025-8.0-L-SS	2.82	8	18	5.6	1.8	1	40IP	6.75	2.6	3.2	4

14583 YJT 4030 Torx recessed anti-theft pan head screw



Material: carbon steel, stainless steel, aluminum, titanium
Surface Treatment: Zinc, Zinc Nickel Alloy, Dacromet
Carbon steel grades: 5.8, 8.8, 10.9, 12.9



Part Number Designation
JX-YJT4030 - M2 - L - SS

Type and Material: Stainless steel
Size Code: M2
Long Code: L
Material Code: SS

Part Number Designation
JX-YJT4030 - M2 - L - ST


Type and Material: Carbon Steel
Size Code: M2
Long Code: L
Material Code: ST

Unit:mm

Size	P/N		Pitch	dk				Slot No.	t				
	Carbon Steel	Stainless steel		max.	min.	max.	min.		A	max.	min.		
M2	JX-YJT4030-M2-L-ST	JX-YJT4030-M2-L-SS	0.4	4	3.7	1.6	1.46	T6	1.75	0.77	0.63		
M2.5	JX-YJT4030-M2.5-L-ST	JX-YJT4030-M2.5-L-SS	0.45	5	4.7	2.1	1.96	T8	2.4	1.04	0.91		
M3	JX-YJT4030-M3-L-ST	JX-YJT4030-M3-L-SS	0.5	5.6	5.3	2.4	2.26	T10	2.8	1.27	1.01		
M3.5	JX-YJT4030-M3.5-L-ST	JX-YJT4030-M3.5-L-SS	0.6	7	6.64	2.6	2.46	T15	3.35	1.33	1.07		
M4	JX-YJT4030-M4-L-ST	JX-YJT4030-M4-L-SS	0.7	8	7.64	3.1	2.92	T20	3.95	1.66	1.27		
M5	JX-YJT4030-M5-L-ST	JX-YJT4030-M5-L-SS	0.8	9.5	9.14	3.7	3.52	T25	4.5	1.91	1.52		
M6	JX-YJT4030-M6-L-ST	JX-YJT4030-M6-L-SS	1	12	11.57	4.6	4.3	T30	5.6	2.42	2.02		
M8	JX-YJT4030-M8-L-ST	JX-YJT4030-M8-L-SS	1.25	16	15.57	6	5.7	T45	7.95	3.18	2.79		
M10	JX-YJT4030-M10-L-ST	JX-YJT4030-M10-L-SS	1.5	20	19.48	7.5	7.14	T50	8.95	4.02	3.62		

JX SCREW FASTENERS SERIES

JASO F 116-2005 T-type TORX countersunk head bolts



Part Number Designation
JX-JASOFCT - M8 - L - ST

Type and Material: Carbon Steel
Size Code: M8
Long Code: L
Material Code: ST

Material: carbon steel, stainless steel, aluminum, titanium
Surface Treatment: Zinc, Zinc Nickel Alloy, Dacromet
Carbon steel grades: 5.8, 8.8, 10.9, 12.9

Part Number Designation
JX-JASOFCT - M8 - L - SS

Type and Material: Stainless steel
Size Code: M8
Long Code: L
Material Code: SS




Thin rod ds ≈ pitch diameter of thread, a ≤ 3P; x ≤ 2P

Unit:mm

Size	d	P/N		Pitch		Slot No.	A	ds		dk		k		t		C
		Carbon Steel	Stainless steel	Coarse Thread	Fine Thread			Standard nom.	par. min.	nom.	min.	nom.	min.	max.	min.	
M8		JX-JASOFCT-M8-L-ST	JX-JASOFCT-M8-L-SS	1.25	/	T40	6.705	8	7.85	16	15.2	4.4	4	2.6	2.35	0.4
M10		JX-JASOFCT-M10-L-ST	JX-JASOFCT-M10-L-SS	1.5	1.25	T50	8.89	10	9.85	20	19	5.5	5	2.8	2.55	0.5
M12		JX-JASOFCT-M12-L-ST	JX-JASOFCT-M12-L-SS	1.75	1.25	T55	11.277	12	11.85	24	22.8	6.6	6	3.7	3.4	0.5
M14		JX-JASOFCT-M14-L-ST	JX-JASOFCT-M14-L-SS	2	1.5	T55	11.277	14	13.85	28	26.7	7.6	7	3.7	3.4	0.5
M16		JX-JASOFCT-M16-L-ST	JX-JASOFCT-M16-L-SS	2	1.5	T60	13.36	16	15.8	32	30.5	8.7	8	4.3	4	0.5

JASO F 116-2005 T-type TORX socket head bolts

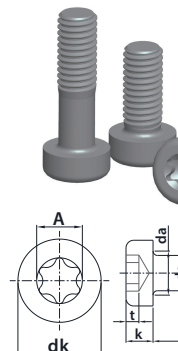


Part Number Designation
JX-JASOFYT - M5 - L - ST

Type and Material: Carbon Steel
Size Code: M5
Long Code: L
Material Code: ST

Part Number Designation
JX-JASOFYT - M5 - L - SS

Type and Material: Stainless steel
Size Code: M5
Long Code: L
Material Code: SS



Thin rod ds ≈ pitch diameter of thread, a ≤ 3P; x ≤ 2P

Unit:mm

Size	d	P/N		Pitch		Slot No.	A	ds		dk		k		t		da	
		Carbon Steel	Stainless steel	Coarse Thread	Fine Thread			Standard nom.	min.	nom.	min.	nom.	max.	min.	max.		
M5		JX-JASOFYT-M5-L-ST	JX-JASOFYT-M5-L-SS	0.8	/	T25	4.483	/	/	8.5	8.14	3.5	3.65	3.35	1.6	1.4	5.7
M6		JX-JASOFYT-M6-L-ST	JX-JASOFYT-M6-L-SS	1	/	T30	5.575	6	5.9	10	9.64	4	4.15	3.85	1.9	1.65	6.8
M8		JX-JASOFYT-M8-L-ST	JX-JASOFYT-M8-L-SS	1.25	/	T40	6.705	8	7.85	13	12.57	5.5	5.65	5.35	2.6	2.35	9.2
M10		JX-JASOFYT-M10-L-ST	JX-JASOFYT-M10-L-SS	1.5	1.25	T50	8.89	10	9.85	16	15.57	7	7.2	6.8	2.8	2.55	11.2
M12		JX-JASOFYT-M12-L-ST	JX-JASOFYT-M12-L-SS	1.75	1.25	T55	11.277	12	11.85	18	17.57	8	8.2	7.8	3.7	3.4	14.2
M14		JX-JASOFYT-M14-L-ST	JX-JASOFYT-M14-L-SS	2	1.5	T55	11.277	14	13.85	21	20.48	9	9.2	8.8	3.7	3.4	16.2
M16		JX-JASOFYT-M16-L-ST	JX-JASOFYT-M16-L-SS	2	1.5	T60	13.36	16	15.8	24	23.48	10	10.2	9.8	4.3	4	18.2
M18		JX-JASOFYT-M18-L-ST	JX-JASOFYT-M18-L-SS	2.5	1.5	T70	15.646	18	17.8	27	26.48	12	12.2	11.8	6.6	6.3	20.2
M20		JX-JASOFYT-M20-L-ST	JX-JASOFYT-M20-L-SS	2.5	1.5	T80	17.678	20	19.8	30	29.48	13	13.2	12.8	7.4	7.1	22.4
M22		JX-JASOFYT-M22-L-ST	JX-JASOFYT-M22-L-SS	2.5	1.5	T90	20.104	22	21.8	33	32.38	14	14.2	13.8	8.4	8	24.4
M24		JX-JASOFYT-M24-L-ST	JX-JASOFYT-M24-L-SS	3	2	T100	22.313	24	23.8	36	35.38	15	15.2	14.8	9.3	8.9	26.4