
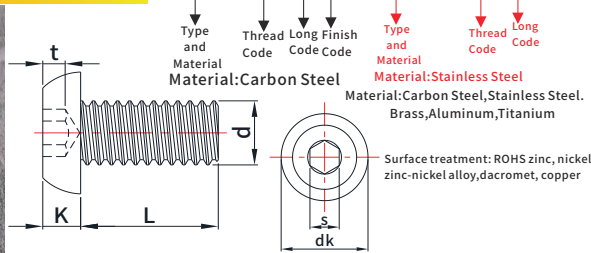


# AUTOMOTIVE SCREWS FASTENERS SERIES

## Hexagon Socket Button Head Screws

Part Number Designation: JX-IS07380-M3-8-ZI, JX-IS07380S-M3-8

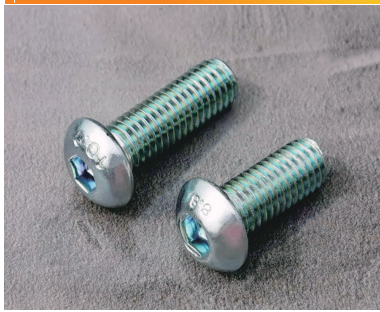


Standard:ISO7380-2011 Steel Grade:8.8,10.9,12.9

Standard:GB/T70.2-2008,ISO7380-1997,JIS.B 1174-1994 Unit:mm

Size d	Thread Code	P/N		L Long	dk		K		S		t
		Carbon Steel	Stainless steel		Max	Min	Max	Min	Max	Min	
M3	0.5	JX-IS07380-M3-L-ST	JX-IS07380-M3-L-SS	5 6 8 10 15 20 25 30 35 40	5.7	5.4	1.65	1.4	2.045	2.020	1.04
M4	0.7	JX-IS07380-M4-L-ST	JX-IS07380-M4-L-SS	8 10 15 20 25 30 35 40 45	7.6	7.24	2.20	1.95	2.56	2.52	1.3
M5	0.8	JX-IS07380-M5-L-ST	JX-IS07380-M5-L-SS	8 10 15 20 25 30 35 40 45	9.50	9.14	2.75	2.50	3.071	3.02	1.56
M6	1.0	JX-IS07380-M6-L-ST	JX-IS07380-M6-L-SS	10 15 20 25 30 35 40 45 50	10.50	10.07	3.3	3.0	4.084	4.02	2.08
M8	1.25	JX-IS07380-M8-L-ST	JX-IS07380-M8-L-SS	10 15 20 25 30 35 40 45 50 55	14.0	13.57	4.4	4.1	5.084	5.02	2.6
M10	1.5	JX-IS07380-M10-L-ST	JX-IS07380-M10-L-SS	20 25 30 35 40 45 50 55 60 65 70 80	17.5	17.07	5.5	5.2	6.095	6.02	3.12
M12	1.75	JX-IS07380-M12-L-ST	JX-IS07380-M12-L-SS	30 35 40 45 50 55 60 65 70 75 80 90	21.0	20.48	6.6	6.24	8.115	8.025	4.16
M16	2.0	JX-IS07380-M16-L-ST	JX-IS07380-M16-L-SS	30 35 40 45 50 55 60 65 70 75 80 90	28.0	27.48	8.8	8.44	10.115	10.025	5.2

## Hexagon Lobular Socket Pan Head Screws

Part Number Designation: JX-SGB2672-M2-3-SS, JX-GB2672-M2-3-ST

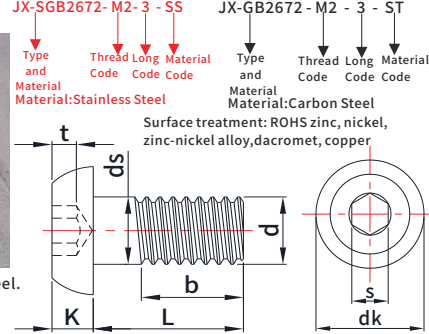

Steel Grade:4,8,5,8,6,8,8,8,10,9,12,9

Material:Carbon Steel,Stainless Steel. Brass,Aluminum,Titanium


Standard:Q215B,GB/T2672-2017

Size	Thread Code	P/N		L Long	b Min	s	dk		K		t		Slot Number
		Carbon Steel	Stainless steel				Max	Min	Max	Min	Max	Min	
M2	0.4	JX-GB2672-M2-L-ST	JX-GB2672-M2-L-SS	3 4 5 6 8 10 12 14 16 20	25	1.75	4.0	3.7	1.6	1.16	0.77	0.63	T6
M2.5	0.45	JX-GB2672-M2.5-L-ST	JX-GB2672-M2.5-L-SS	3 4 5 6 8 10 12 14 16 20 25 30	25	2.4	5.0	4.7	2.1	1.96	1.04	0.91	T8
M3	0.5	JX-GB2672-M3-L-ST	JX-GB2672-M3-L-SS	4 5 6 8 10 12 14 16 20 25 30 35	25	2.8	5.6	5.3	2.4	2.26	1.27	1.01	T10
M3.5	0.6	JX-GB2672-M3.5-L-ST	JX-GB2672-M3.5-L-SS	5 6 8 10 12 14 16 20 25 30 35 40	38	3.35	7.0	6.64	2.6	2.46	1.33	1.07	T15
M4	0.7	JX-GB2672-M4-L-ST	JX-GB2672-M4-L-SS	5 6 8 10 12 14 16 20 25 30 35 40	38	3.95	8.0	7.64	3.1	2.92	1.66	1.27	T20
M5	0.8	JX-GB2672-M5-L-ST	JX-GB2672-M5-L-SS	6 8 10 12 14 16 20 25 30 35 40 45	38	4.5	9.5	9.14	3.7	3.52	1.91	1.52	T25
M6	1.0	JX-GB2672-M6-L-ST	JX-GB2672-M6-L-SS	6 8 10 12 14 16 20 25 30 35 40 45	38	5.6	12	11.57	4.6	4.3	2.42	2.02	T30
M8	1.25	JX-GB2672-M8-L-ST	JX-GB2672-M8-L-SS	10 12 14 16 20 25 30 35 40 45 50	38	7.95	16	15.57	6.0	5.7	3.18	2.79	T45
M10	1.25	JX-GB2672-M10-L-ST	JX-GB2672-M10-L-SS	12 14 16 20 25 30 35 40 45 50 55	38	8.95	20	19.48	7.5	7.14	4.02	3.62	T50

Surface treatment: color zinc, ROHS blue zinc, zinc nickel alloy, can also be produced according to customer requirements

# AUTOMOTIVE SCREWS FASTENERS SERIES

## Hexagon Socket Button Head Screws With Collar




Material:Carbon Steel,Stainless Steel. Brass,Aluminum,Titanium Steel Grade:8.8,10.9,12.9

Standard:ISO 7380-2-2011, JIS B 1174-2017,GB/T 70.4-2015 Unit:mm

Size d	Thread Code	P/N		L Long	b	t	h		dk		k		s						
		Carbon Steel	Stainless steel				Min	Max	Min	Max	Min	Max	Min	Max	Min				
M3	0.5	JX-IS07380-2-M3-L-ST	JX-IS07380-2-M3-L-SS	20 30 40 50	18	1.04	0.7	0.55	6.9	6.32	3	2.86	5.7	5.4	1.65	1.4	2	2.08	1.04
M4	0.7	JX-IS07380-2-M4-L-ST	JX-IS07380-2-M4-L-SS	20 30 40 50	20	1.3	0.8	0.65	9.4	8.32	4	3.82	7.6	7.24	2.20	1.95	2.5	2.58	1.3
M5	0.8	JX-IS07380-2-M5-L-ST	JX-IS07380-2-M5-L-SS	30 40 50 60	22	1.56	1.0	0.8	11.8	11.1	5	4.82	9.5	9.14	2.75	2.5	3	3.08	1.56
M6	1.0	JX-IS07380-2-M6-L-ST	JX-IS07380-2-M6-L-SS	30 40 50 60	24	2.08	1.2	1.0	13.6	12.9	6	5.82	10.5	10.07	3.3	3.0	4	4.095	2.08
M8	1.25	JX-IS07380-2-M8-L-ST	JX-IS07380-2-M8-L-SS	40 50 60 70	28	2.6	1.5	1.25	17.8	17.1	8	7.78	14	13.57	4.4	4.1	5	5.14	2.6
M10	1.5	JX-IS07380-2-M10-L-ST	JX-IS07380-2-M10-L-SS	40 50 60 70	32	3.12	2.0	1.7	21.9	21.06	10	9.78	17.5	17.07	5.5	5.2	6	6.14	3.12
M12	1.75	JX-IS07380-2-M12-L-ST	JX-IS07380-2-M12-L-SS	50 60 70 80	36	4.16	2.4	2.1	26	25.16	12	11.73	21	20.48	6.6	6.24	8	8.175	4.16
M16	2.0	JX-IS07380-2-M16-L-ST	JX-IS07380-2-M16-L-SS	60 70 80 100	44	5.2	2.8	2.5	34	33	16	15.73	28	27.48	8.8	8.44	10	10.175	5.2

## Hexagon Socket Flat Head Screw

Part Number Designation: JX-HS-M4-4-ST, JX-HS-M4-4-SS




Material:Carbon Steel,Stainless Steel. Brass,Aluminum,Titanium Surface treatment: ROHS zinc, nickel, zinc-nickel alloy,dacromet, copper

Steel Grade:8.8,10.9,12.9 Unit:mm

Size	P/N		P	d	dk	k	Hexagonal wrench
	Carbon Steel	Stainless Steel					
M4	JX-HS-M4-4-ST	JX-HS-M4-4-SS	0.7	4	8.6	1.9	2.5mm
M5	JX-HS-M5-5-ST	JX-HS-M5-5-SS	0.8	5	10.2	2.4	3mm
M6	JX-HS-M6-6-ST	JX-HS-M6-6-SS	1.0	6	12.6	2.9	4mm
M8	JX-HS-M8-8-ST	JX-HS-M8-8-SS	1.25	8	14.1	3.7	5mm
M6	JX-HS-M6-6-D16-ST	JX-HS-M6-6-D16-SS	1.0	6	16	3.2	4mm
M8	JX-HS-M8-8-D16-ST	JX-HS-M8-8-D16-SS	1.25	8	16	4.9	5mm

## Hexagon Socket Flat Head Screw

Part Number Designation: JX-HSH-M5-11-ST, JX-HSH-M5-11-SS



Steel Grade:8.8,10.9,12.9 Material:Carbon Steel,Stainless Steel. Brass,Aluminum,Titanium

Surface treatment: ROHS zinc, nickel, zinc-nickel alloy,dacromet, copper Unit:mm

Size	P/N		P	dk	k	s
	Carbon Steel	Stainless Steel				
M5	JX-HSH-M5-11-ST	JX-HSH-M5-11-SS	0.8	11	2.5	4.05
M6	JX-HSH-M6-12.5-ST	JX-HSH-M6-12.5-SS	1.0	12.5	2.35	4.05
M8	JX-HSH-M8-16-ST	JX-HSH-M8-16-SS	1.25	16	3.35	5.05

Surface treatment: color zinc, ROHS blue zinc, zinc nickel alloy, can also be produced according to customer requirements