



SCREWS FASTENERS PLUG SERIES

DIN 3852 Hollow Hex Plug - ED

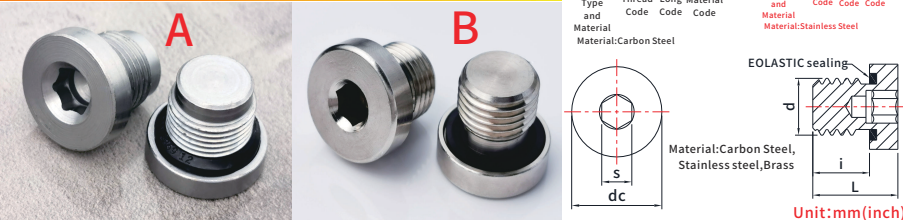

Size	P/N			Pitch	PP	Rubber pad	dc	i	L	s
	Carbon Steel	Stainless Steel	Brass							
G1/8	JX-DIN3852-G1/8-L-ST	JX-DIN3852-G1/8-L-SS	JX-DIN3852-G1/8-L-B	-	28	ED-10	14	8	12	5
G1/4	JX-DIN3852-G1/4-L-ST	JX-DIN3852-G1/4-L-SS	JX-DIN3852-G1/4-L-B	-	19	ED-14	19	12	17	6
G3/8	JX-DIN3852-G3/8-L-ST	JX-DIN3852-G3/8-L-SS	JX-DIN3852-G3/8-L-B	-	19	ED-17	22	12	17	8
G1/2	JX-DIN3852-G1/2-L-ST	JX-DIN3852-G1/2-L-SS	JX-DIN3852-G1/2-L-B	-	14	ED-21	27	14	19	10
G3/4	JX-DIN3852-G3/4-L-ST	JX-DIN3852-G3/4-L-SS	JX-DIN3852-G3/4-L-B	-	14	ED-27	32	16	21	12
G1	JX-DIN3852-G1-L-ST	JX-DIN3852-G1-L-SS	JX-DIN3852-G1-L-B	-	11	ED-33	40	16	22.5	17
G1 1/4	JX-DIN3852-G1 1/4-L-ST	JX-DIN3852-G1 1/4-L-SS	JX-DIN3852-G1 1/4-L-B	-	11	ED-42	50	16	22.5	22
G1 1/2	JX-DIN3852-G1 1/2-L-ST	JX-DIN3852-G1 1/2-L-SS	JX-DIN3852-G1 1/2-L-B	-	11	ED-48	55	16	22.5	24
M8	JX-DIN3852-M8-L-ST	JX-DIN3852-M8-L-SS	JX-DIN3852-M8-L-B	1	-	ED-8	12	8	12	4
M10	JX-DIN3852-M10-L-ST	JX-DIN3852-M10-L-SS	JX-DIN3852-M10-L-B	1	-	ED-10	14	8	12	5
M12	JX-DIN3852-M12-L-ST	JX-DIN3852-M12-L-SS	JX-DIN3852-M12-L-B	1.5	-	ED-12	17	12	17	6
M14	JX-DIN3852-M14-L-ST	JX-DIN3852-M14-L-SS	JX-DIN3852-M14-L-B	1.5	-	ED-14	19	12	17	6
M16	JX-DIN3852-M16-L-ST	JX-DIN3852-M16-L-SS	JX-DIN3852-M16-L-B	1.5	-	ED-16	22	12	17	8
M18	JX-DIN3852-M18-L-ST	JX-DIN3852-M18-L-SS	JX-DIN3852-M18-L-B	1.5	-	ED-18	24	12	17	8
M20	JX-DIN3852-M20-L-ST	JX-DIN3852-M20-L-SS	JX-DIN3852-M20-L-B	1.5	-	ED-20	26	14	19	10
M22	JX-DIN3852-M22-L-ST	JX-DIN3852-M22-L-SS	JX-DIN3852-M22-L-B	1.5	-	ED-22	27	14	19	10
M26	JX-DIN3852-M26-L-ST	JX-DIN3852-M26-L-SS	JX-DIN3852-M26-L-B	1.5	-	ED-27	32	16	21	12
M27	JX-DIN3852-M27-L-ST	JX-DIN3852-M27-L-SS	JX-DIN3852-M27-L-B	2	-	ED-27	32	16	21	12
M33	JX-DIN3852-M33-L-ST	JX-DIN3852-M33-L-SS	JX-DIN3852-M33-L-B	2	-	ED-33	40	16	22.5	17
M42	JX-DIN3852-M42-L-ST	JX-DIN3852-M42-L-SS	JX-DIN3852-M42-L-B	2	-	ED-42	50	16	22.5	22
M48	JX-DIN3852-M48-L-ST	JX-DIN3852-M48-L-SS	JX-DIN3852-M48-L-B	2	-	ED-48	55	16	22.5	24


Metric hexagon socket cheese head screws metal plugs with collar joints for use with O-rings. Metric Hexagon Socket Cheese Head Screws Metal Plugs With Collar Joints For Use With O-Rings.r

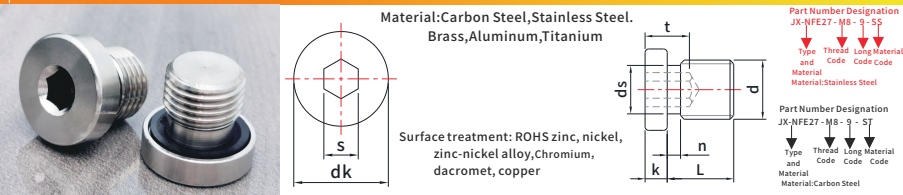

规格 Size	料号/P/N			P 螺距	dk	k	L			s	t	n				ds
	碳钢Carbon Steel	不锈钢Stainless Steel	铜Brass				nom	max	min			max	min	max	min	
M5	JX-NFE27-M5-L-ST	JX-NFE27-M5-L-SS	JX-NFE27-M5-L-B	0.8	11	3	6.8	7	6.6	2.5	4	1.7	1.4	3.8	3.7	
M8	JX-NFE27-M8-L-ST	JX-NFE27-M8-L-SS	JX-NFE27-M8-L-B	1	11	3	9	9.2	8.8	4	6	1.8	1.5	6.55	6.45	
M10	JX-NFE27-M10-L-ST	JX-NFE27-M10-L-SS	JX-NFE27-M10-L-B	1	13	3	9	9.2	8.8	6	6	1.8	1.5	8.55	8.45	
M12	JX-NFE27-M12-L-ST	JX-NFE27-M12-L-SS	JX-NFE27-M12-L-B	1.5	17	3	10	10.2	9.8	6	8	2.6	2.3	9.85	9.75	
M14	JX-NFE27-M14-L-ST	JX-NFE27-M14-L-SS	JX-NFE27-M14-L-B	1.5	19	3	10	10.2	9.8	6	8	2.6	2.3	11.85	11.75	
M16	JX-NFE27-M16-L-ST	JX-NFE27-M16-L-SS	JX-NFE27-M16-L-B	1.5	22	3	11.5	11.7	11.3	8	8	2.6	2.3	13.85	13.75	
M18	JX-NFE27-M18-L-ST	JX-NFE27-M18-L-SS	JX-NFE27-M18-L-B	1.5	24	4	13	13.2	12.8	10	8	2.6	2.3	15.85	15.75	
M22	JX-NFE27-M22-L-ST	JX-NFE27-M22-L-SS	JX-NFE27-M22-L-B	1.5	27	4	14	14.2	13.8	12	10	3.3	3	19.2	19.1	
M27	JX-NFE27-M27-L-ST	JX-NFE27-M27-L-SS	JX-NFE27-M27-L-B	2	32	4	17	17.2	16.8	18	12	3.3	3	24.2	24.1	
M33	JX-NFE27-M33-L-ST	JX-NFE27-M33-L-SS	JX-NFE27-M33-L-B	2	41	5	17	17.2	16.8	18	12	2.3	2	30.2	30.1	
M42	JX-NFE27-M42-L-ST	JX-NFE27-M42-L-SS	JX-NFE27-M42-L-B	2	50	5	17.5	17.7	17.3	21	12	3.3	3	39.4	39.3	
M50	JX-NFE27-M50-L-ST	JX-NFE27-M50-L-SS	JX-NFE27-M50-L-B	2	55	5	19.5	19.7	19.3	21	12	3.3	3	47.2	47.1	
M60	JX-NFE27-M60-L-ST	JX-NFE27-M60-L-SS	JX-NFE27-M60-L-B	2	65	5	22.5	22.7	22.3	21	12	3.3	3	57.2	57.1	


SCREWS FASTENERS PLUG SERIES

Q 624 Hexagon Socket Pipe Magnetic Plugs

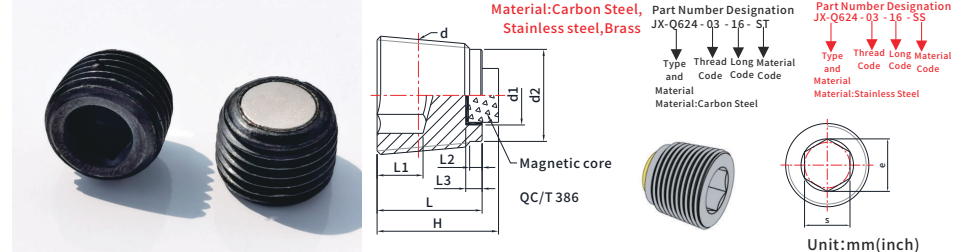

Size	P/N		d	s			e	H	L	L1	L2	L3	d1	d2	Magnetic core
	Carbon Steel	Stainless Steel		nom	max	min									
03	JX-Q624-03-L-ST	JX-Q624-03-L-SS	NPT3/8	10	10.115	10.025	11.43	18.5	16	7	1	2.5	9	14	Q62008
04	JX-Q624-04-L-ST	JX-Q624-04-L-SS	NPT1/2	12	12.142	12.032	13.72	21.5	19	8	2	2.5	13	17.5	Q62012
06	JX-Q624-06-L-ST	JX-Q624-06-L-SS	NPT3/4	14	14.142	14.032	16	25	22	10	3	4	17.5	22	Q62016
10	JX-Q624-10-L-ST	JX-Q624-10-L-SS	NPT1	19	19.275	19.065	21.73	28	25	10	3	5	24	28	Q62022
12	JX-Q624-12-L-ST	JX-Q624-12-L-SS	NPT1-1/4	19	19.275	19.065	21.73	33	30	12	4	6	28	36	Q62026

JX-GB 831-1988 Slotted shoulder screws

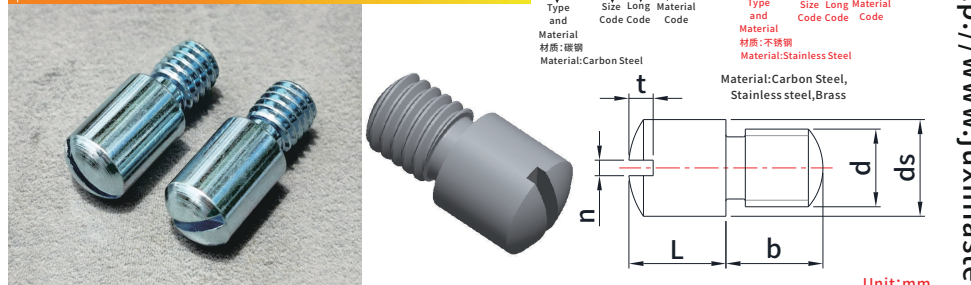

Size	P/N			Pitch	ds			n			t	Thread length
	Carbon Steel	Stainless Steel	Brass		Max	Min	Nom	Max	Min	Min		
M1.6	JX-GB831-M1.6-L-ST	JX-GB831-M1.6-L-SS	JX-GB831-M1.6-L-B	0.35	2.48	2.42	0.4	0.6	0.46	0.6	2.5	
M2	JX-GB831-M2-L-ST	JX-GB831-M2-L-SS	JX-GB831-M2-L-B	0.4	2.98	2.92	0.5	0.7	0.56	0.7	3	
M2.5	JX-GB831-M2.5-L-ST	JX-GB831-M2.5-L-SS	JX-GB831-M2.5-L-B	0.45	3.47	3.395	0.5	0.7	0.66	0.9	3.5	
M3	JX-GB831-M3-L-ST	JX-GB831-M3-L-SS	JX-GB831-M3-L-B	0.5	3.97	3.895	0.6	0.8	0.66	1	4	
M4	JX-GB831-M4-L-ST	JX-GB831-M4-L-SS	JX-GB831-M4-L-B	0.7	4.97	4.895	0.8	1	0.86	1.4	5	
M5	JX-GB831-M5-L-ST	JX-GB831-M5-L-SS	JX-GB831-M5-L-B	0.8	5.97	5.895	0.8	1	0.86	1.7	6	
M6	JX-GB831-M6-L-ST	JX-GB831-M6-L-SS	JX-GB831-M6-L-B	1	7.97	7.87	1.2	1.51	1.26	2	8	
M8	JX-GB831-M8-L-ST	JX-GB831-M8-L-SS	JX-GB831-M8-L-B	1.25	9.96	9.87	1.6	1.91	1.66	2.5	10	
M10	JX-GB831-M10-L-ST	JX-GB831-M10-L-SS	JX-GB831-M10-L-B	1.5	11.95	11.84	2	2.31	2.06	3	12	

1.The shaft diameter ds can also be manufactured according to the limit deviation of f9.

