


# JX STAMPING FASTENERS SERIES

## DIN128A, B Curved Spring Lock Washers

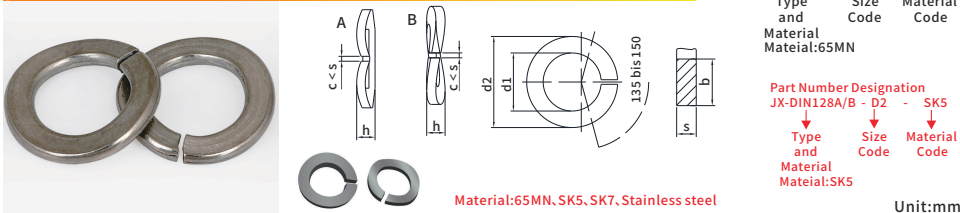


Part Number Designation  
 JX-DIN128A/B - D2 - 65MN  
 ↓ Type and Material Material:65MN  
 ↓ Size Code  
 ↓ Material Code

Part Number Designation  
 JX-DIN128A/B - D2 - SK5  
 ↓ Type and Material Material:SK5  
 ↓ Size Code  
 ↓ Material Code

Material:65MN, SK5, SK7, Stainless steel

Size D	P/N				d1	d2	b	s	h	r			
	65MN	Sk5	Sk7	Stainless steel									
2	JX-DIN128A-D2-65MN	JX-DIN128A-D2-SK5	JX-DIN128A-D2-SK7	JX-DIN128A-D2-SS	2.1	2.4	4.4	0.9	0.5	0.7	0.9	0.1	
2.5	JX-DIN128A-D2.5-65MN	JX-DIN128A-D2.5-SK5	JX-DIN128A-D2.5-SK7	JX-DIN128A-D2.5-SS	2.6	2.9	5.1	1	0.6	0.9	1.1	0.1	
3	JX-DIN128A-D3-65MN	JX-DIN128A-D3-SK5	JX-DIN128A-D3-SK7	JX-DIN128A-D3-SS	3.1	3.4	6.2	1.3	0.7	1.1	1.3	0.1	
3.5	JX-DIN128A-D3.5-65MN	JX-DIN128A-D3.5-SK5	JX-DIN128A-D3.5-SK7	JX-DIN128A-D3.5-SS	3.6	3.9	6.7	1.3	±0.1	1.1	1.3	0.1	
4	JX-DIN128A-D4-65MN	JX-DIN128A-D4-SK5	JX-DIN128A-D4-SK7	JX-DIN128A-D4-SS	4.1	4.4	7.6	1.5	0.8	1.2	1.4	0.2	
5	JX-DIN128A-D5-65MN	JX-DIN128A-D5-SK5	JX-DIN128A-D5-SK7	JX-DIN128A-D5-SS	5.1	5.4	9.2	1.8	1	1.5	1.7	0.2	
6	JX-DIN128A-D6-65MN	JX-DIN128A-D6-SK5	JX-DIN128A-D6-SK7	JX-DIN128A-D6-SS	6.1	6.5	11.8	2.5	1.3	2	2.2	0.3	
7	JX-DIN128A-D7-65MN	JX-DIN128A-D7-SK5	JX-DIN128A-D7-SK7	JX-DIN128A-D7-SS	7.1	7.5	12.8	2.5	±0.15	1.3	2	0.3	
8	JX-DIN128A-D8-65MN	JX-DIN128A-D8-SK5	JX-DIN128A-D8-SK7	JX-DIN128A-D8-SS	8.1	8.5	14.8	3	1.6	2.45	2.75	0.5	
10	JX-DIN128A-D10-65MN	JX-DIN128A-D10-SK5	JX-DIN128A-D10-SK7	JX-DIN128A-D10-SS	10.2	10.7	18.1	3.5	1.8	2.85	3.15	0.5	
12	JX-DIN128A-D12-65MN	JX-DIN128A-D12-SK5	JX-DIN128A-D12-SK7	JX-DIN128A-D12-SS	12.2	12.7	21.1	4	2.1	3.35	3.65	1	
14	JX-DIN128A-D14-65MN	JX-DIN128A-D14-SK5	JX-DIN128A-D14-SK7	JX-DIN128A-D14-SS	14.2	14.7	24.1	4.9	2.4	3.9	4.3	1	
16	JX-DIN128A-D16-65MN	JX-DIN128A-D16-SK5	JX-DIN128A-D16-SK7	JX-DIN128A-D16-SS	16.2	17	27.4	5	±0.2	2.8	4.5	1	
18	JX-DIN128A-D18-65MN	JX-DIN128A-D18-SK5	JX-DIN128A-D18-SK7	JX-DIN128A-D18-SS	18.2	19	29.4	5	2.8	4.5	5.1	1	
20	JX-DIN128A-D20-65MN	JX-DIN128A-D20-SK5	JX-DIN128A-D20-SK7	JX-DIN128A-D20-SS	20.2	21.2	33.6	6	3.2	5.1	5.9	1	
22	JX-DIN128A-D22-65MN	JX-DIN128A-D22-SK5	JX-DIN128A-D22-SK7	JX-DIN128A-D22-SS	22.5	23.5	39	6	3.2	5.1	5.9	1	
24	JX-DIN128A-D24-65MN	JX-DIN128A-D24-SK5	JX-DIN128A-D24-SK7	JX-DIN128A-D24-SS	24.5	25.5	40	7	4	6.5	7.5	1.6	
27	JX-DIN128A-D27-65MN	JX-DIN128A-D27-SK5	JX-DIN128A-D27-SK7	JX-DIN128A-D27-SS	27.5	28.5	43	7	±0.2	4	6.5	1.6	
30	JX-DIN128A-D30-65MN	JX-DIN128A-D30-SK5	JX-DIN128A-D30-SK7	JX-DIN128A-D30-SS	30.5	31.7	48.2	8	6	9.5	10.5	1.6	
36	JX-DIN128A-D36-65MN	JX-DIN128A-D36-SK5	JX-DIN128A-D36-SK7	JX-DIN128A-D36-SS	36.5	37.7	58.2	10	6	10.3	11.3	1.6	
42	JX-DIN128A-D42-65MN	JX-DIN128A-D42-SK5	JX-DIN128A-D42-SK7	JX-DIN128A-D42-SS	42.5	43.7	68.2	12	7	12	13	2	
48	JX-DIN128A-D48-65MN	JX-DIN128A-D48-SK5	JX-DIN128A-D48-SK7	JX-DIN128A-D48-SS	49	50.5	75	12	±0.25	7	12	2	
56	JX-DIN128A-D56-65MN	JX-DIN128A-D56-SK5	JX-DIN128A-D56-SK7	JX-DIN128A-D56-SS	57	58.5	87	14	8	14	15.5	2	
64	JX-DIN128A-D64-65MN	JX-DIN128A-D64-SK5	JX-DIN128A-D64-SK7	JX-DIN128A-D64-SS	65	66.5	95	14	±0.25	8	14	15.5	2
72	JX-DIN128A-D72-65MN	JX-DIN128A-D72-SK5	JX-DIN128A-D72-SK7	JX-DIN128A-D72-SS	73	74.5	103	14	8	14	15.5	2	
80	JX-DIN128A-D80-65MN	JX-DIN128A-D80-SK5	JX-DIN128A-D80-SK7	JX-DIN128A-D80-SS	81	82.5	111	14	8	14	15.5	2	
90	JX-DIN128A-D90-65MN	JX-DIN128A-D90-SK5	JX-DIN128A-D90-SK7	JX-DIN128A-D90-SS	91	92.5	121	14	8	14	15.5	2	
100	JX-DIN128A-D100-65MN	JX-DIN128A-D100-SK5	JX-DIN128A-D100-SK7	JX-DIN128A-D100-SS	101	102.5	131	14	8	14	15.5	2	

## DIN74361C Fastening Devices For Bolt Centering - Form C - Spring Lock Washers

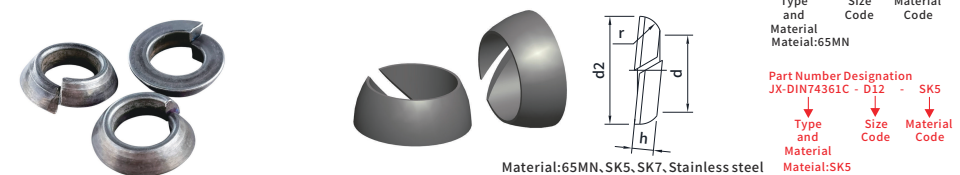

Part Number Designation  
 JX-DIN74361C - D12 - 65MN  
 ↓ Type and Material Material:65MN  
 ↓ Size Code  
 ↓ Material Code

Part Number Designation  
 JX-DIN74361C - D12 - SK5  
 ↓ Type and Material Material:SK5  
 ↓ Size Code  
 ↓ Material Code


Material:65MN, SK5, SK7, Stainless steel

Size D	P/N				d	d2	h	r
	65MN	Sk5	Sk7	Stainless steel				
12	JX-DIN74361C-D12-65MN	JX-DIN74361C-D12-SK5	JX-DIN74361C-D12-SK7	JX-DIN74361C-D12-SS	12.5	23	6	12
14	JX-DIN74361C-D14-65MN	JX-DIN74361C-D14-SK5	JX-DIN74361C-D14-SK7	JX-DIN74361C-D14-SS	14.5	26	6	14
18	JX-DIN74361C-D18-65MN	JX-DIN74361C-D18-SK5	JX-DIN74361C-D18-SK7	JX-DIN74361C-D18-SS	18.5	29	7	16
20	JX-DIN74361C-D20-65MN	JX-DIN74361C-D20-SK5	JX-DIN74361C-D20-SK7	JX-DIN74361C-D20-SS	20.5	34	8	18
22	JX-DIN74361C-D22-65MN	JX-DIN74361C-D22-SK5	JX-DIN74361C-D22-SK7	JX-DIN74361C-D22-SS	22.5	34	8	18

Remark: We only show part of the specifications, we can also produce various sizes according to the customer's requirements

# JX STAMPING FASTENERS SERIES

## DIN6905 Spring Lock Washers for Screw and Washer Assemblies

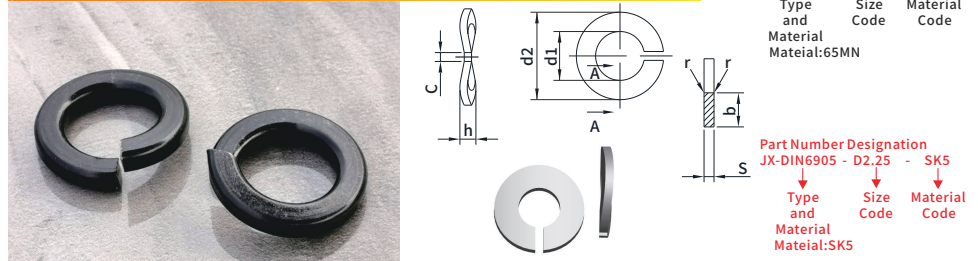

Part Number Designation  
 JX-DIN6905 - D2.25 - 65MN  
 ↓ Type and Material Material:65MN  
 ↓ Size Code  
 ↓ Material Code


Part Number Designation  
 JX-DIN6905 - D2.25 - SK5  
 ↓ Type and Material Material:SK5  
 ↓ Size Code  
 ↓ Material Code

Material:65MN, SK5, SK7, Stainless steel

Unit:mm

Size D	P/N				d1	d2	b	S		h		r				
	65MN	Sk5	Sk7	Stainless steel				nom.	max.	nom.	max.					
2.25	JX-DIN6905-D2.25-65MN	JX-DIN6905-D2.25-SK5	JX-DIN6905-D2.25-SK7	JX-DIN6905-D2.25-SS	2.25	2.35	4.55	1	0.9	1.1	0.6	0.5	0.7	0.9	1.1	0.1
2.7	JX-DIN6905-D2.7-65MN	JX-DIN6905-D2.7-SK5	JX-DIN6905-D2.7-SK7	JX-DIN6905-D2.7-SS	2.7	2.8	5.6	1.3	1.2	1.4	0.7	0.6	0.8	1.1	1.3	0.1
3.2	JX-DIN6905-D3.2-65MN	JX-DIN6905-D3.2-SK5	JX-DIN6905-D3.2-SK7	JX-DIN6905-D3.2-SS	3.2	3.3	6.1	1.3	1.2	1.4	0.7	0.6	0.8	1.1	1.3	0.1
3.6	JX-DIN6905-D3.6-65MN	JX-DIN6905-D3.6-SK5	JX-DIN6905-D3.6-SK7	JX-DIN6905-D3.6-SS	3.6	3.75	6.95	1.5	1.4	1.6	0.8	0.7	0.9	1.2	1.4	0.2
4.55	JX-DIN6905-D4.55-65MN	JX-DIN6905-D4.55-SK5	JX-DIN6905-D4.55-SK7	JX-DIN6905-D4.55-SS	4.55	4.75	8.55	1.8	1.7	1.9	1	0.9	1.1	1.5	1.7	0.2
5.5	JX-DIN6905-D5.5-65MN	JX-DIN6905-D5.5-SK5	JX-DIN6905-D5.5-SK7	JX-DIN6905-D5.5-SS	5.5	5.7	11	2.5	2.35	2.65	1.3	1.2	1.4	2	2.2	0.3
7.4	JX-DIN6905-D7.4-65MN	JX-DIN6905-D7.4-SK5	JX-DIN6905-D7.4-SK7	JX-DIN6905-D7.4-SS	7.4	7.65	13.95	3	2.85	3.15	1.6	1.5	1.7	2.45	2.75	0.5
9.3	JX-DIN6905-D9.3-65MN	JX-DIN6905-D9.3-SK5	JX-DIN6905-D9.3-SK7	JX-DIN6905-D9.3-SS	9.3	9.55	16.95	3.5	3.3	3.7	1.8	1.7	1.9	2.85	3.15	0.5
11	JX-DIN6905-D11-65MN	JX-DIN6905-D11-SK5	JX-DIN6905-D11-SK7	JX-DIN6905-D11-SS	11	11.3	19.7	4	3.8	4.2	2.1	1.95	2.25	3.35	3.65	1

## DIN137A Curved spring washers

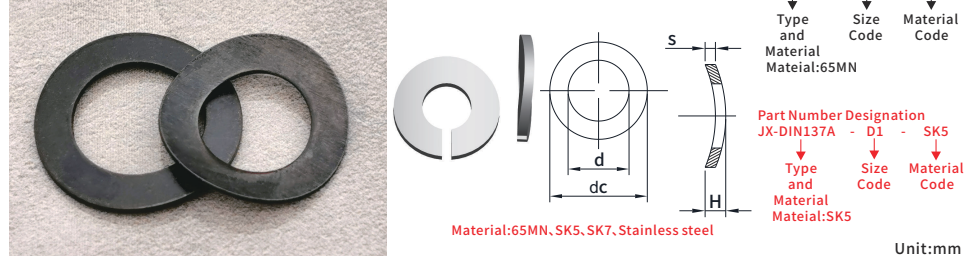

Part Number Designation  
 JX-DIN137A - D1 - 65MN  
 ↓ Type and Material Material:65MN  
 ↓ Size Code  
 ↓ Material Code

Part Number Designation  
 JX-DIN137A - D1 - SK5  
 ↓ Type and Material Material:SK5  
 ↓ Size Code  
 ↓ Material Code

Material:65MN, SK5, SK7, Stainless steel

Unit:mm

Size D	P/N				d	dc	S	h	Weight 1000PCS kg		
	65MN	Sk5	Sk7	Stainless steel							
1	JX-DIN137A-D1-65MN	JX-DIN137A-D1-SK5	JX-DIN137A-D1-SK7	JX-DIN137A-D1-SS	1.1	2.5	0.2	0.35	0.7	0.008	
1.2	JX-DIN137A-D1.2-65MN	JX-DIN137A-D1.2-SK5	JX-DIN137A-D1.2-SK7	JX-DIN137A-D1.2-SS	1.3	3	0.2	0.35	0.7	0.009	
1.4	JX-DIN137A-D1.4-65MN	JX-DIN137A-D1.4-SK5	JX-DIN137A-D1.4-SK7	JX-DIN137A-D1.4-SS	1.5	3	0.25	±0.02	0.4	0.8	0.01
1.7	JX-DIN137A-D1.7-65MN	JX-DIN137A-D1.7-SK5	JX-DIN137A-D1.7-SK7	JX-DIN137A-D1.7-SS	1.8	4	0.25	0.45	0.9	0.02	
1.8	JX-DIN137A-D1.8-65MN	JX-DIN137A-D1.8-SK5	JX-DIN137A-D1.8-SK7	JX-DIN137A-D1.8-SS	1.9	4	0.25	0.45	0.9	0.02	
2	JX-DIN137A-D2-65MN	JX-DIN137A-D2-SK5	JX-DIN137A-D2-SK7	JX-DIN137A-D2-SS	2.2	4.5	0.3	0.5	1	0.028	
2.3	JX-DIN137A-D2.3-65MN	JX-DIN137A-D2.3-SK5	JX-DIN137A-D2.3-SK7	JX-DIN137A-D2.3-SS	2.5	5	0.3	±0.03	0.5	1	0.035
2.6	JX-DIN137A-D2.6-65MN	JX-DIN137A-D2.6-SK5	JX-DIN137A-D2.6-SK7	JX-DIN137A-D2.6-SS	2.8	5.5	0.3	0.55	1.1	0.041	
3	JX-DIN137A-D3-65MN	JX-DIN137A-D3-SK5	JX-DIN137A-D3-SK7	JX-DIN137A-D3-SS	3.2	6	0.4	0.65	1.3	0.063	
3.5	JX-DIN137A-D3.5-65MN	JX-DIN137A-D3.5-SK5	JX-DIN137A-D3.5-SK7	JX-DIN137A-D3.5-SS	3.7	7	0.4	0.7	1.4	0.088	
4	JX-DIN137A-D4-65MN	JX-DIN137A-D4-SK5	JX-DIN137A-D4-SK7	JX-DIN137A-D4-SS	4.3	8	0.5	±0.05	0.8	1.6	0.14
5	JX-DIN137A-D5-65MN	JX-DIN137A-D5-SK5	JX-DIN137A-D5-SK7	JX-DIN137A-D5-SS	5.3	10	0.5	0.9	1.8	0.222	
6	JX-DIN137A-D6-65MN	JX-DIN137A-D6-SK5	JX-DIN137A-D6-SK7	JX-DIN137A-D6-SS	6.4	11	0.5	1.1	2.2	0.247	
7	JX-DIN137A-D7-65MN	JX-DIN137A-D7-SK5	JX-DIN137A-D7-SK7	JX-DIN137A-D7-SS	7.4	12	0.5	1.2	2.4	0.265	
8	JX-DIN137A-D8-65MN	JX-DIN137A-D8-SK5	JX-DIN137A-D8-SK7	JX-DIN137A-D8-SS	8.4	15	0.5	1.7	3.4	0.476	
10	JX-DIN137A-D10-65MN	JX-DIN137A-D10-SK5	JX-DIN137A-D10-SK7	JX-DIN137A-D10-SS	10.5	18	0.8	2	4	1.05	
12	JX-DIN137A-D12-65MN	JX-DIN137A-D12-SK5	JX-DIN137A-D12-SK7	JX-DIN137A-D12-SS	12.5	20	0.9	±0.06	2	4	1.2

Remark: We only show part of the specifications, we can also produce various sizes according to the customer's requirements