


# JX BLIND RIVET NUTS FASTENERS SERIES

## Thin head Open Round body plain blind rivet nuts

Material:Steel

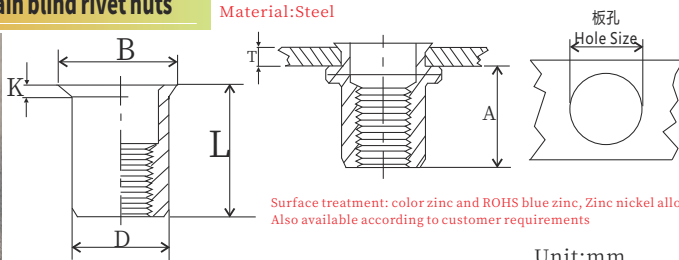


Surface treatment: color zinc and ROHS blue zinc, Zinc nickel alloy  
Also available according to customer requirements

Unit:mm

Size	Part No	Grip Range T	A Rer	Hole Size <sup>+0.1</sup> <sub>0</sub>	D <sup>+0.07</sup> <sub>-0.1</sub>	B <sup>+0.2</sup>	K <sup>+0.1</sup>	L <sup>+0.3</sup>
M3	JX-S-M3-9	0.5-2.0	6.2	5.0	4.9	6.0	0.5	9.0
	JX-S-M3-9-UK	0.5-1.5	5.5	4.8	4.65	5.4	0.4	9.0
M4	JX-S-M4-10.5	0.5-2.0	6.5	6.0	5.9	7.0	0.5	10.5
	JX-S-M4-13	2.0-4.0	6.5	6.0	5.9	7.0	0.5	13.0
	JX-S-M4-10.5-UK	0.5-2.0	6.5	6.4	6.25	7.0	0.5	10.5
M5	JX-S-M5-11.5	0.5-2.0	7.0	7.0	6.9	8.0	0.5	11.5
	JX-S-M5-13	2.0-4.0	7.0	7.0	6.9	8.0	0.5	13.0
	JX-S-M5-12-UK	0.5-2.5	7.5	7.2	7.05	7.8	0.5	12.0
M6	JX-S-M6-14	0.5-2.5	8.5	9.0	8.9	10.5	0.6	14.0
	JX-S-M6-17	2.5-5.0	8.5	9.0	8.9	10.5	0.6	17.0
	JX-S-M6-15-UK	1.0-3.0	9.2	9.6	9.45	10.3	0.6	15.0
M8	JX-S-M8-16.5	0.5-3.0	10.0	11.0	10.9	12.0	0.65	16.5
	JX-S-M8-18.5	3.0-5.0	10.0	11.0	10.9	12.0	0.65	18.5
	JX-S-M8-16-UK	1.0-3.5	10.5	10.6	10.45	11.3	0.60	16.0
M10	JX-S-M10-17.7	0.5-3.0	13.0	13.0	12.9	14.1	0.7	17.7
	JX-S-M10-21	3.0-5.0	13.0	13.0	12.9	14.1	0.7	21.0
	JX-S-M10-18	0.5-3.0	12.5	12.0	11.9	13.0	0.7	18.0
	JX-S-M10-20-UK	1.0-4.0	12.8	12.8	12.65	13.8	0.65	20.0

## Thin head Closed end round body blind rivet nuts

Material:Steel

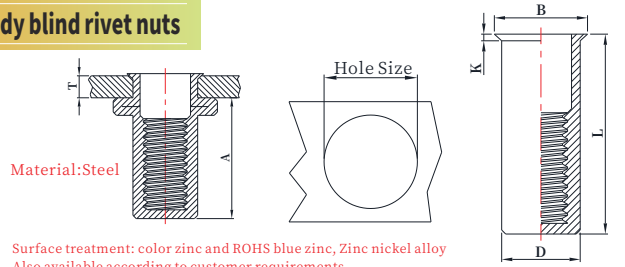

Surface treatment: color zinc and ROHS blue zinc, Zinc nickel alloy  
Also available according to customer requirements


Unit:mm

Size	Part No	Grip Range T	A Rer	Hole Size <sup>+0.1</sup> <sub>0</sub>	D <sup>+0.07</sup> <sub>-0.1</sub>	B <sup>+0.2</sup>	K <sup>+0.1</sup>	L <sup>+0.3</sup>
M4	JX-BS-M4-15	0.5-2.0	11	6	5.9	7.0	0.5	15.0
	JX-BS-M4-16	2.0-3.5	11	6	5.9	7.0	0.5	16.0
M5	JX-BS-M5-16.5	0.5-2.0	12.5	7.0	6.9	8.0	0.5	16.5
	JX-BS-M5-17.5	2.0-3.5	12.5	7.0	6.9	8.0	0.5	17.5
M6	JX-BS-M6-20.5	0.5-2.5	15.5	9.0	8.9	10.0	0.6	20.5
	JX-BS-M6-22	2.5-4.0	15.5	9.0	8.9	10.0	0.6	22.0
M8	JX-BS-M8-23	0.5-3.0	17.0	11.0	10.9	12.0	0.65	23.0
	JX-BS-M8-24.5	2.5-4.5	17.0	11.0	10.9	12.0	0.65	24.5
M10	JX-BS-M10-24.5	1.0-3.0	18.2	13.0	12.9	14.1	0.7	24.5
	JX-BS-M10-26	3.0-5.0	18.2	13.0	12.9	14.1	0.7	26.0

# JX BLIND RIVET NUTS FASTENERS SERIES

## Flat Head Open Round body knurled blind rivet nuts

Surface treatment: color zinc and ROHS blue zinc, Zinc nickel alloy  
Also available according to customer requirements

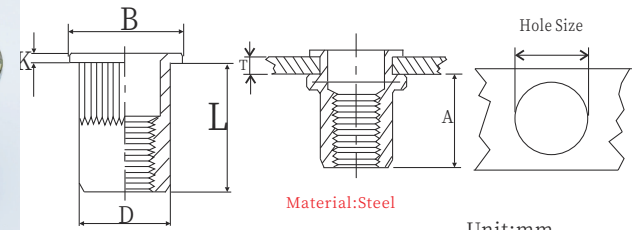


Material:Steel

Unit:mm

Size	Part No	Grip Range T	A Rer	Hole Size <sup>+0.1</sup> <sub>0</sub>	D <sup>+0.07</sup> <sub>-0.1</sub>	B <sup>+0.2</sup>	K <sup>+0.2</sup>	L <sup>+0.3</sup>
M3	JX-F-M3-R-10	0.5-1.5	6.0	5.0	4.9	8.0	0.8	10.0
M4	JX-F-M4-R-10.5	0.5-2.0	6.0	6.0	5.9	9.0	0.8	10.5
	JX-F-M4-R-12	2.0-3.5	6.0	6.0	5.9	9.0	0.8	12.0
M5	JX-F-M5-R-13	0.5-2.5	7.5	7.0(7.5)	6.9(7.4)	10.0	1.0	13.0
	JX-F-M5-R-16.5	2.5-5.0	8.5	7.0(7.5)	6.9(7.4)	10.0	1.0	16.5
M6	JX-F-M6-R-15.5	0.5-3.0	9.2	9.0	8.9	12.3/13.0	1.3	15.5
	JX-F-M6-R-19.5	3.0-5.5	10.5	9.0	8.9	12.3/13.0	1.3	19.5
M8	JX-F-M8-R-18.5	1.0-3.5	11.5	11.0	10.9	14.5/16.0	1.5	18.5
	JX-F-M8-R-21	3.5-6.0	11.5	11.0	10.9	14.5/16	1.5	21.0
M10	JX-F-M10-R-21.5	1.0-4.0	13.5	13.0	12.9	17/19	1.7	21.5
	JX-F-M10-R-24	4.0-6.5	13.5	13.0	12.9	17/19	1.7	24.0
	JX-F-M10-D12-R-19	1.0-3.5	11.0	12.0	11.9	16.0	1.6	19.0
M12	JX-F-M12-D15-R-25	4.0-6.5	14.0	15.0	14.9	18	1.7	25.0
	JX-F-M12-D15-R-22	10.-4.0	13.5	15.0	14.9	18	1.7	22.0
	JX-F-M12-D16-R-25	1.0-3.5	15.0	16.0	15.9	22.0	2.0	25.0
	JX-F-M12-D16-R-28	3.5-6.0	16.0	16.0	15.9	22.0	2.0	28.0

## Flat Head Closed end Round body knurled Blind Rivet Nuts

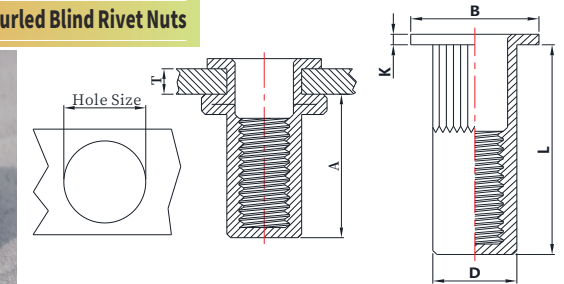

Material:Steel

Surface treatment: color zinc and ROHS blue zinc, Zinc nickel alloy  
Also available according to customer requirements

Unit:mm

Size	Part No	Grip Range T	A Rer	Hole Size <sup>+0.1</sup> <sub>0</sub>	D <sup>+0.07</sup> <sub>-0.1</sub>	B <sup>+0.2</sup>	K <sup>+0.2</sup>	L <sup>+0.3</sup>
M4	JX-BF-M4-R-16	0.5-2.0	11.3	6.0	5.9	9.0	0.8	16.0
	JX-BF-M4-R-18	2.0-4.0	11.3	6.0	5.9	9.0	0.8	18.0
M5	JX-BF-M5-R-17	0.5-2.5	11.5	7.0	6.9	10.0	1.0	17.0
	JX-BF-M5-R-19	2.5-5.0	11.5	7.0	6.9	10.0	1.0	19.0
M6	JX-BF-M6-R-19.2	0.5-3.0	12.7	9.0	8.9	12.3	1.3	19.2
	JX-BF-M6-R-21	3.0-5.0	12.7	9.0	8.9	12.3	1.3	21.0
	JX-BF2.5-M6-R-19	0.5-2.5	11.5	9.0	8.9	12.3	2.5	19.0
M8	JX-BF-M8-R-21.5	0.5-3.0	14.8	11.0	10.9	15.0	1.5	21.5
	JX-BF-M8-R-24	3.0-5.5	14.8	11.0	10.9	15.0	1.5	24.0
M10	JX-BF-M10-R-27	1.0-4.0	19.2	13.0	12.9	17.0	1.6	27.0

The brim can be coated with anti-loosening glue