


BLIND RIVETS SERIES

High Strength Ring groove rivet

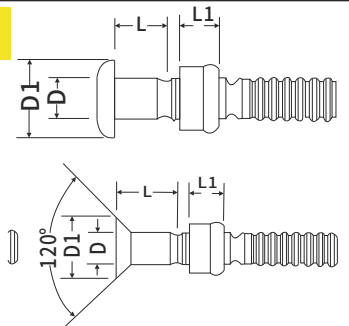

(1)Material: (Aluminum) P/N:JX-D-L-AL
 (2)Material:(Steel) P/N:JX-D-L-ST
 (3)Material:(Stainless Steel) P/N:JX-D-L-SS



Unit:mm

Size D	P/N			L	D1	L1	Hole Size	Grip Range	Shear Strength KN			Tensile Strength KN		
	Steel	Aluminum	Stainless Steel						(1)	(2)	(3)	(1)	(2)	(3)
4.8 (3/16)	JX-RGD4.8-4-ST	JX-RGD4.8-4-AL	JX-RGD4.8-4-SS	4.0	9.5	6.0	5.1	3.5-4.5	4.67	8.63	9.26	4.72	7.34	7.79
	JX-RGD4.8-6-ST	JX-RGD4.8-6-AL	JX-RGD4.8-6-SS	6.0	9.5	6.0	5.1	5.5-6.5						
	JX-RGD4.8-8-ST	JX-RGD4.8-8-AL	JX-RGD4.8-8-SS	8.0	9.5	6.0	5.1	7.5-8.5						
	JX-RGD4.8-10-ST	JX-RGD4.8-10-AL	JX-RGD4.8-10-SS	10.0	9.5	6.0	5.1	9.5-10.5						
	JX-RGD4.8-12-ST	JX-RGD4.8-12-AL	JX-RGD4.8-12-SS	12.0	9.5	6.0	5.1	11.5-12.5						
	JX-RGD4.8-14-ST	JX-RGD4.8-14-AL	JX-RGD4.8-14-SS	14.0	9.5	6.0	5.1	13.5-14.5						
	JX-RGD4.8-16-ST	JX-RGD4.8-16-AL	JX-RGD4.8-16-SS	16.0	9.5	6.0	5.1	15.5-16.5						
6.4 (1/4")	JX-RGD6.4-4-ST	JX-RGD6.4-4-AL	JX-RGD6.4-4-SS	4.0	12.5	8.0	6.5	3.5-4.5	8.31	14.73	17.71	7.92	13.35	14.55
	JX-RGD6.4-6-ST	JX-RGD6.4-6-AL	JX-RGD6.4-6-SS	6.0	12.5	8.0	6.5	5.5-6.5						
	JX-RGD6.4-8-ST	JX-RGD6.4-8-AL	JX-RGD6.4-8-SS	8.0	12.5	8.0	6.5	7.5-8.5						
	JX-RGD6.4-10-ST	JX-RGD6.4-10-AL	JX-RGD6.4-10-SS	10.0	12.5	8.0	6.5	9.5-10.5						
	JX-RGD6.4-12-ST	JX-RGD6.4-12-AL	JX-RGD6.4-12-SS	12.0	12.5	8.0	6.5	11.5-12.5						
	JX-RGD6.4-14-ST	JX-RGD6.4-14-AL	JX-RGD6.4-14-SS	14.0	12.5	8.0	6.5	13.5-14.5						
	JX-RGD6.4-16-ST	JX-RGD6.4-16-AL	JX-RGD6.4-16-SS	16.0	12.5	8.0	6.5	15.5-16.5						
	JX-RGD6.4-18-ST	JX-RGD6.4-18-AL	JX-RGD6.4-18-SS	18.0	12.5	8.0	6.5	17.5-18.5						
	JX-RGD6.4-20-ST	JX-RGD6.4-20-AL	JX-RGD6.4-20-SS	20.0	12.5	8.0	6.5	19.5-20.5						
	JX-RGD6.4-22-ST	JX-RGD6.4-22-AL	JX-RGD6.4-22-SS	22.0	12.5	8.0	6.5	21.5-22.5						
10.0 (3/8)	JX-RGD10.0-6-ST	JX-RGD10.0-6-AL	JX-RGD10.0-6-SS	6.0	19.0	11.4	10.1	5.5-6.5	18.69	32.08	31.58	18.68	28.93	31.58
	JX-RGD10.0-8-ST	JX-RGD10.0-8-AL	JX-RGD10.0-8-SS	8.0	19.0	11.4	10.1	7.5-8.5						
	JX-RGD10.0-10-ST	JX-RGD10.0-10-AL	JX-RGD10.0-10-SS	10.0	19.0	11.4	10.1	9.5-10.5						
	JX-RGD10.0-12-ST	JX-RGD10.0-12-AL	JX-RGD10.0-12-SS	12.0	19.0	11.4	10.1	11.5-12.5						
	JX-RGD10.0-14-ST	JX-RGD10.0-14-AL	JX-RGD10.0-14-SS	14.0	19.0	11.4	10.1	13.5-14.5						
	JX-RGD10.0-16-ST	JX-RGD10.0-16-AL	JX-RGD10.0-16-SS	16.0	19.0	11.4	10.1	15.5-16.5						
	JX-RGD10.0-18-ST	JX-RGD10.0-18-AL	JX-RGD10.0-18-SS	18.0	19.0	11.4	10.1	17.5-18.5						
JX-RGD10.0-20-ST	JX-RGD10.0-20-AL	JX-RGD10.0-20-SS	20.0	19.0	11.4	10.1	19.5-20.5							

http://www.juxinfasteners.com

BLIND RIVETS SERIES

Inter-LOCK Dome Head Type Rivets

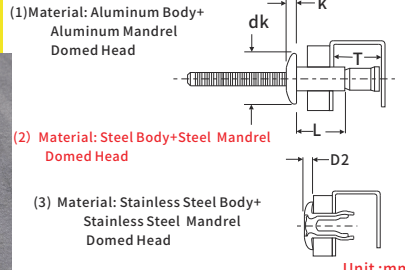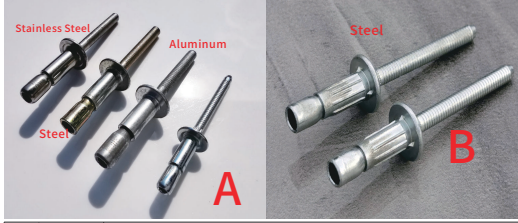


(1)Material: Aluminum Body+ Aluminum Mandrel Domed Head
 (2) Material: Steel Body+Steel Mandrel Domed Head
 (3) Material: Stainless Steel Body+ Stainless Steel Mandrel Domed Head

Unit:mm

Size	Grip Range	P/N									Hole Size	L Max.	dk Max.	k Max.	T Min.	D2 Max.
		Aluminum Dome Head			Steel Dome Head			Stainless Steel Dome Head								
		Inter Lock	Shear N	Tensile N	Inter Lock	Shear N	Tensile N	Inter Lock	Shear N	Tensile N						
4.8 (3/16)	1.6-6.9	JX-RH4.8-10-AL-I	2300	1900	JX-RH4.8-10-ST-I	5600	4400	JX-RH4.8-10-SS-I	6000	4500	4.9-5.1	10	10.1	2.1	10.5	1.9
	5.4-11.0	JX-RH4.8-14-AL-I			JX-RH4.8-14-ST-I			JX-RH4.8-14-SS-I			4.9-5.1	14	10.1	2.1	13.5	
6.4 (1/4")	2.1-9.5	JX-RH6.4-14-AL-I	5300	3400	JX-RH6.4-14-ST-I	10500	8200	JX-RH6.4-14-SS-I	10500	8200	6.6-7.0	14	13.4	2.9	12.2	2.7
	2.1-15.8	JX-RH6.4-20-AL-I			JX-RH6.4-20-ST-I			JX-RH6.4-20-SS-I			6.6-7.0	20	13.4	2.9	16.4	

Mono-LOCK Dome Head Type Rivets

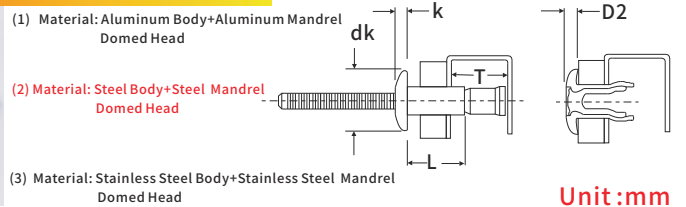


(1) Material: Aluminum Body+Aluminum Mandrel Domed Head
 (2) Material: Steel Body+Steel Mandrel Domed Head
 (3) Material: Stainless Steel Body+Stainless Steel Mandrel Domed Head

Unit:mm

Size	Grip Range	P/N									Hole Size	L Max.	dk Max.	k Max.	T Min.	D2 Max.
		Aluminum Dome Head			Steel Dome Head			Stainless Steel Dome Head								
		Mono Lock	Shear N	Tensile N	Mono Lock	Shear N	Tensile N	Mono Lock	Shear N	Tensile N						
4.8 (3/16)	1.6-6.9	JX-RH4.8-10-AL-M	2400	2000	JX-RH4.8-10-ST-M	5800	4100	JX-RH4.8-10-SS-M	6000	4500	4.9-5.1	10	10.1	2.1	10.5	1.9
	1.6-11.0	JX-RH4.8-14-AL-M			JX-RH4.8-14-ST-M			JX-RH4.8-14-SS-M			4.9-5.1	14	10.1	2.1	13.5	
6.4 (1/4")	2.1-9.5	JX-RH6.4-14-AL-M	5600	3700	JX-RH6.4-14-ST-M	10500	8200	JX-RH6.4-14-SS-M	10500	8200	6.6-7.0	14	13.4	2.9	12.2	2.7
	2.1-15.8	JX-RH6.4-20-AL-M			JX-RH6.4-20-ST-M			JX-RH6.4-20-SS-M			6.6-7.0	20	13.4	2.9	16.4	

Inter-LOCK Countersunk Head Type Rivets

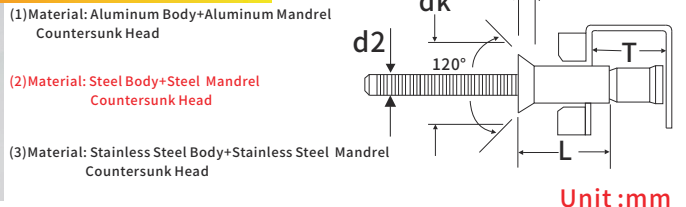

(1)Material: Aluminum Body+Aluminum Mandrel Countersunk Head
 (2)Material: Steel Body+Steel Mandrel Countersunk Head
 (3)Material: Stainless Steel Body+Stainless Steel Mandrel Countersunk Head

Unit:mm

Size	Grip Range	P/N									Hole Size	L Max.	dk Max.	k Max.	T Min.	d2 Max.
		Aluminum CSK Head			Steel CSK Head			Stainless Steel CSK Head								
		Inter Lock	Shear N	Tensile N	Inter Lock	Shear N	Tensile N	Inter Lock	Shear N	Tensile N						
4.8 (3/16)	3.2-8.4	JX-CH4.8-12-AL-I	2300	1900	JX-CH4.8-12-ST-I	5400	4000	JX-CH4.8-12-SS-I	6000	4500	4.9-5.1	12	9.2	2.1	10.5	3.1
	7.7-12.7	JX-CH4.8-16-AL-I			JX-CH4.8-16-ST-I			JX-CH4.8-16-SS-I			4.9-5.1	16	9.2	2.1	13.5	
6.4 (1/4")	4.3-12.1	JX-CH6.4-16-AL-I	5300	3400	JX-CH6.4-16-ST-I	10500	8200	JX-CH6.4-16-SS-I	10500	8200	6.6-7.0	16	11.4	2.3	12.2	4.1
	10.5-18.4	JX-CH6.4-22-AL-I			JX-CH6.4-22-ST-I			JX-CH6.4-22-SS-I			6.6-7.0	22	11.4	2.3	16.4	

http://www.juxinfasteners.com